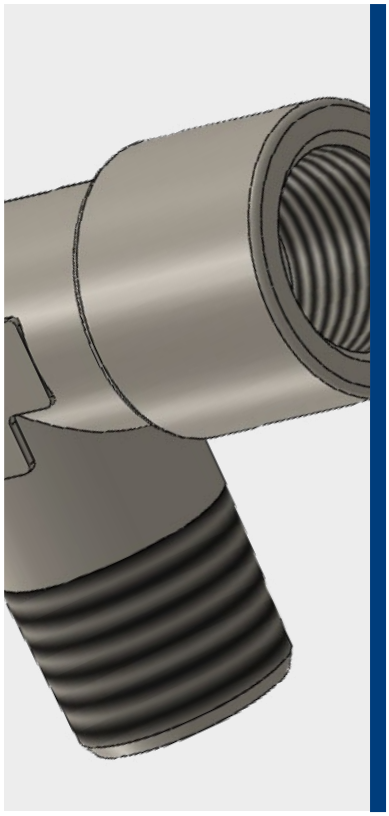


-20°C ÷ 100°C with NBR o-ring
-15°C ÷ 200°C with Viton o-ring
The working temperature is determined by the properties of the tube used

Working pressure:
60 Bar
20 Bar (1110-3PCS)

Compressed air, water, oil and fluids suitable with construction materials

- Taper gas BSPT ISO 7
  from R1/8" to R1"
- Parallel gas BSPP ISO 228
  from G1/8" to G1"
- Metric ISO 262
  M5

Body: Nickel-plated brass
- Turning: UNI EN 12164 CW614N
- Hot forging & machining:
  UNI EN 12165 CW617N
- 1322 & 1110-3PCS: Yellow brass
  UNI EN 12165 CW614N


O-ring: NBR or Viton

AVAILABILITY:
- Available on request and with minimum quantity in yellow brass
- Available on request with NBR or Viton o-ring

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

CONSTRUCTION DETAILS

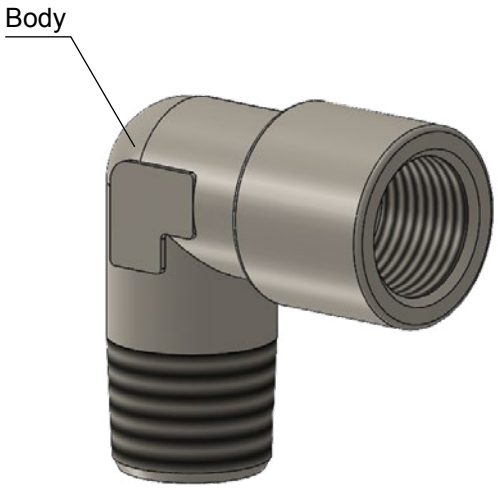

TIGHTENING TORQUE
TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Nm	8	12	14	16	18	20

TIGHTENING TORQUE
PARALLEL GAS BSPP ISO 228 & METRIC ISO 262

THREAD	M5x0,8	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Nm	0,8	1,2	1,5	2,5	3,5	4,5	5,5

drawings and technical data are not binding & can be changed without notice