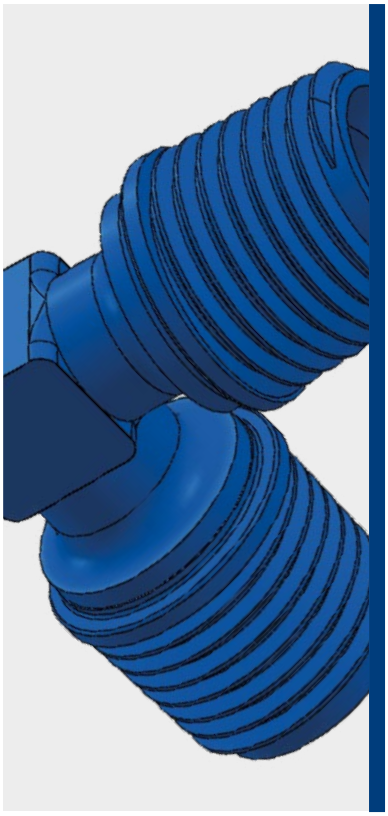


-20°C ÷ +110°C
Subject to applications

Working pressure:
14 Bar (at 20°C)
Depending on the tube used

Compressed air, water and fluids suitable with construction materials

- Taper gas BSPT ISO 7
  from R1/8" to R3/4"
- NPT
  from N1/8" to N3/4"

Body: Nylon 66

FEATURES

The fittings of this series have plastic thread and consecuently we reccomended to avoid excessive force during screwing and to teflon the thread before use in order to prevent any type of loss.


Food contact materials
EC 1935/2004

D.M. 174/2004

Products in compliance with
EC Regulation 1907/2006

Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

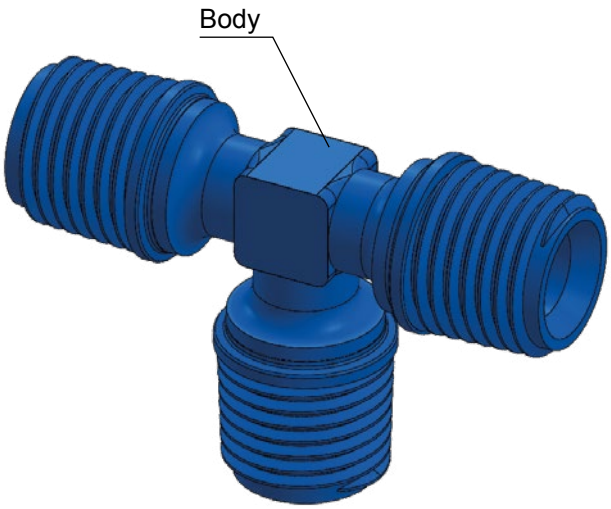

TIGHTENING TORQUE

TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"	3/4"
Nm	0,1	0,8	4	6	8