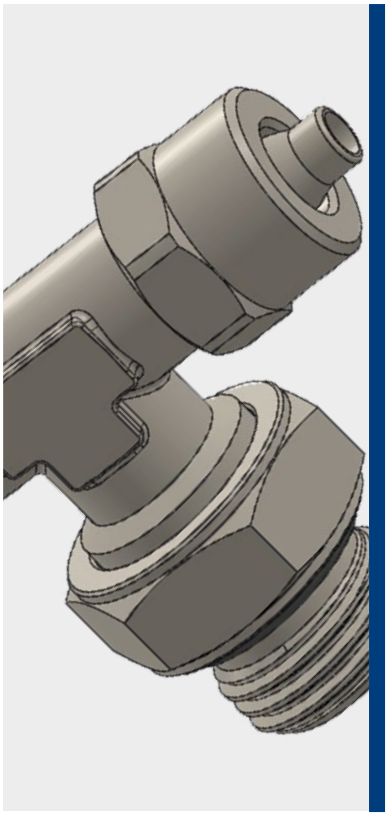


-20°C ÷ 100°C with o-ring in NBR
-15°C ÷ 200°C with o-ring in Viton
The working temperature depends on the features of the tube used.

Working pressure:
18 Bar
The working temperature depends on the features of the tube used.

Compressed air, water, oil and fluids suitable with construction materials

- Taper gas BSPT ISO 7 from R1/8" to R1/2"
- Parallel gas BSPP ISO 228 from G1/8" to G1/2"
- Metric ISO 262 M5, M6 and M12

Polyurethane, polyethylene, polyamide, PTFE, FEP

Body: Nickel-plated brass
Turning: UNI EN 12164 CW 614N
Hot forging & machining:
UNI EN 12165 CW 617N
Lock nut: Nickel-plated brass
UNI EN 12164 CW 614N
O-ring: NBR 70


AVAILABILITY:
- Available on request and with a minimum yellow brass quantity
- Available on request with o-ring in viton

SILICONE FREE

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

CONSTRUCTION DETAILS

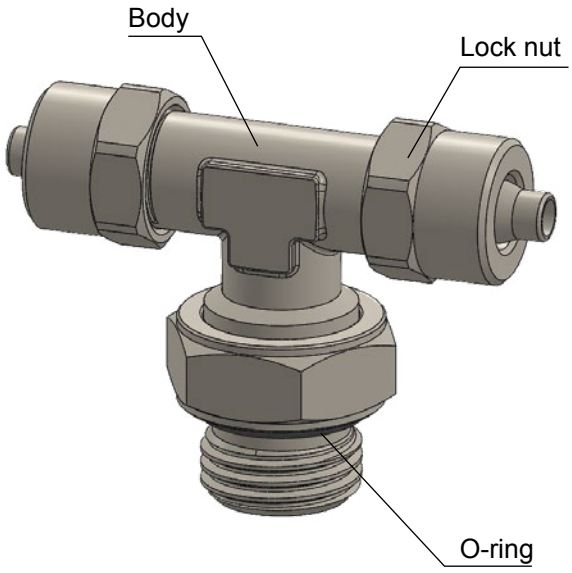

TIGHTENING TORQUE
TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"
Nm	8	12	14	16

TIGHTENING TORQUE
PARALLEL GAS BSPP ISO 228 & METRIC ISO 262

THREAD	M5x0,8	M6x1	1/8"	1/4"	3/8"	1/2"
Nm	0,8	0,8	1,2	1,5	2,5	3,5