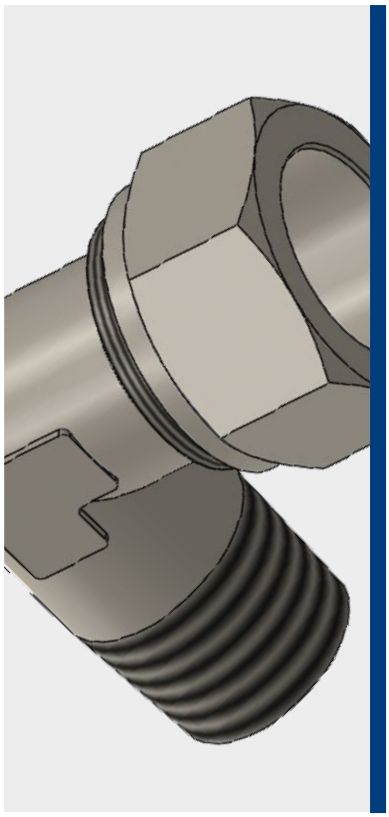


-20°C ÷ +80°C
The working temperature is determined by the features of the tube used

Working pressure:
Up to 60 Bar
The max working pressure is determined by the features of the tube used

Compressed air, oil and fluids suitable with construction materials

- Taper gas BSPT ISO 7 from R1/8" to R1/2"
- Parallel gas BSPP ISO 228 from G1/8" to G1/2"

Metal tubes: brass, copper and aluminum
Plastic tubes: using support bush 3250: Polyethylene PE, Polyamide PA, PTFE, FEP (3250)


Body: Turning - nickel-plated brass UNI EN 12164 CW614N
Hot forging & machining - nickel-plated brass UNI EN12165 CW617N
Lock nut: Nickel-plated brass UNI EN 12164 CW614N
Ogive: Yellow brass UNI EN 12164 CW 614N

SILICONE FREE

REACH COMPLIANT — Products in compliance with EC Regulation 1907/2006

RoHS3 — Products in compliance with the directive EU 2015/863

CONSTRUCTION DETAILS

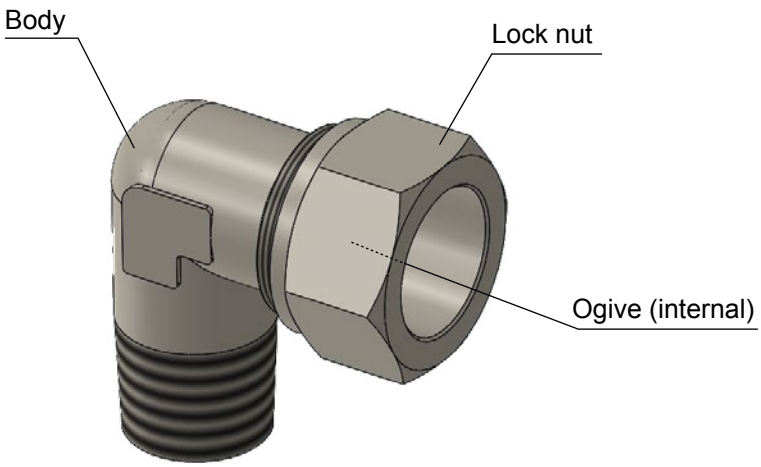

TIGHTENING TORQUE
TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"
Nm	8	12	14	16

TIGHTENING TORQUE
PARALLEL GAS BSPP ISO 228

THREAD	1/8"	1/4"	3/8"	1/2"
Nm	5	8	10	12

drawings and technical data are not binding & can be changed without notice