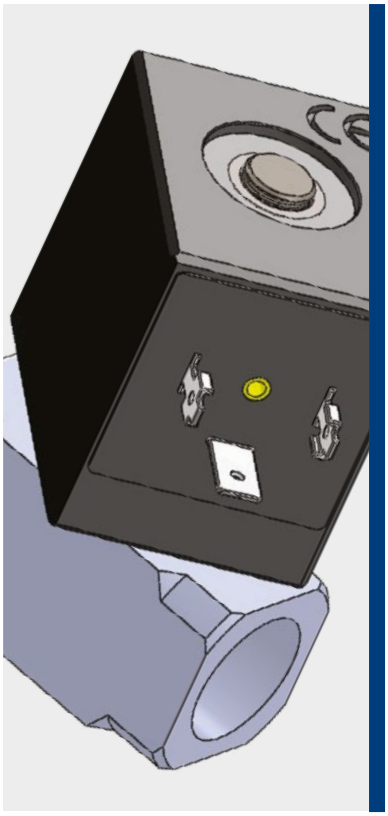


Environment temperature:
-20°C ÷ 95°C
Fluid temperature:
- EPDM: -20°C ÷ 140°C
- FKM: -10°C ÷ 155°C
- PTFE: -30°C ÷ 180°C
- KALREZ: -30°C ÷ 250°C

Working pressure:
See pressure table

Compressed air, vapour, water and fluids suitable with construction materials

Parallel gas BSPP 228 from G1/8" to G1/2"

AVAILABILITY - SVX2
Seals available on request in EPDM, PTFE and Kalrez

Body: Stainless steel AISI 316L
Orifice: Stainless steel AISI 316L
Guide tube: Stainless steel
Plunger: Stainless steel IMRE
Spring: Stainless steel
Insulation: IP 65 with connector
Coil: PA 66 - Ryton (SM5 type)
Seal: FKM

Food contact materials EC 1935/2004

D.M. 174/2004

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

FEATURES
- Connection: EN 175301-803 A;
- Coil insulation class: H;
- Metallic seal between body and guide tube, 360° welding of the tube guide, guarantees endurance and reliability (SVX2);
- O-ring seal between body and guide tube, 360° welding of the tube guide, guarantees endurance and reliability (SVX3);
- 2/2-way & 3/2-way NC direct acting solenoid valve for neutral fluids compatible with food grade FKM and stainless steel AISI 316L;
- There are no minimum working pressure requirements;

MODEL	TYPE	CODE	THREAD	DN (mm)	KV (m^3/h)	COIL	ΔP BAR			TA. ENV. TEMP. °C	POWER		ALTERNATIVE SEAL		
							MIN	MAX AC	MAX DC		VA AC	W DC	EPDM	PTFE	KALREZ
STANDARD	2/2 NC	SVX2C15G18	G 1/8"	1,5	0,07	SH14/B	0	25	20	80	25	12	✓	✓	✓
		SVX2C30G18	G 1/8"	3	0,2	SH14/B	0	16	12	80	25	12	✓	✓	✓
		SVX2C25G14	G 1/4"	2,5	0,13	SH14/B	0	20	12	80	25	12	✓	✓	✓
		SVX2C40G14	G 1/4"	4	0,38	SH14/HP	0		8	80		25	✓	✓	✓
						SH14	0	15	6	80	32	17	✓	✓	✓
						SH14/B	0	7		80	22		✓	✓	✓
		SVX2C50G38	G 3/8"	5	0,48	SH14/HP	0		5	80		27	✓	✓	✓
						SH14	0	10	2	80	32	17	✓	✓	✓
						SH14/B	0	5		80	22		✓	✓	✓
		SVX2C64G38	G 3/8"	6,4	0,66	SH14/HP	0		4	80		27	✓	✓	✓
						SH14	0	7	1,5	80	32	17	✓	✓	✓
						SH14/B	0	3		80	22		✓	✓	✓
		SVX2C64G12	G 1/2"	6,4	0,66	SH14/HP	0		4	80		27	✓	✓	✓
						SH14	0	7	1,5	80	32	17	✓	✓	✓
						SH14/B	0	3		80	22		✓	✓	✓
	3/2 NC	SVX3C15G18	G 1/8"	1,5	0,07	SH14/B	0	18	18	80	25	12			
		SVX3C25G14	G 1/4"	2,5	0,13	SH14/B	0	10	10	80	25	12			
		SVX3C40G14	G 1/4"	4	0,38	SH14/B	0	4	4	80	25	12			