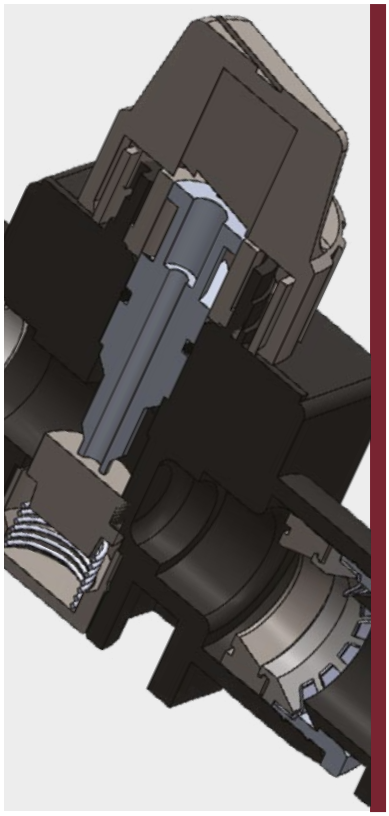


0°C ÷ 80°C

Working pressure:
from 0 to 16 Bar
Negative pressure:
- 0,95 Bar (- 95 Kpa)

Compressed air & vacuum
(do not use with water)

- Taper gas BSPT ISO 7
  from R1/8" to R1/2" with teflon
- Parallel gas BSPP ISO 228
  from G1/8" to G1/2" with o-ring

Polyamide PA, Polyurethane PU

AVAILABILITY

Available in 2-way version (with blue handle)

Body: Nickel-plated brass and PBT
Lock claw: Stainless steel AISI 301
Seal: NBR silicone free
Collet: POM
Valve: POM
Handle: POM (Black)
Back ring: POM
Collar: Nickel-plated zinc

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

CONSTRUCTION DETAILS

