

STANDARD FITTINGS NYLON





PLUS

GOOD MECHANICAL RESISTANCE


**SUITABLE FOR DOMESTIC AND
INDUSTRIAL USE AND FOR FOOD
FLUIDS**

**WIDE RANGE OF SHAPES AND
THREADS AVAILABLE**



 p. 292 / 1800	 p. 292 / 1802	 p. 292 / 1810	 p. 292 / 1812	 p. 293 / 1820	 p. 293 / 1825
 p. 293 / 1827	 p. 294 / 1830	 p. 294 / 1832	 p. 294 / 1834	 p. 294 / 1840	 p. 295 / 1850
 p. 295 / 1855	 p. 295 / 1875	 p. 296 / 1800N	 p. 296 / 1802N	 p. 296 / 1810N	 p. 296 / 1812N
 p. 297 / 1820N	 p. 297 / 1825N	 p. 297 / 1827N	 p. 298 / 1830N	 p. 298 / 1832N	 p. 298 / 1840N
 p. 298 / 1850N					



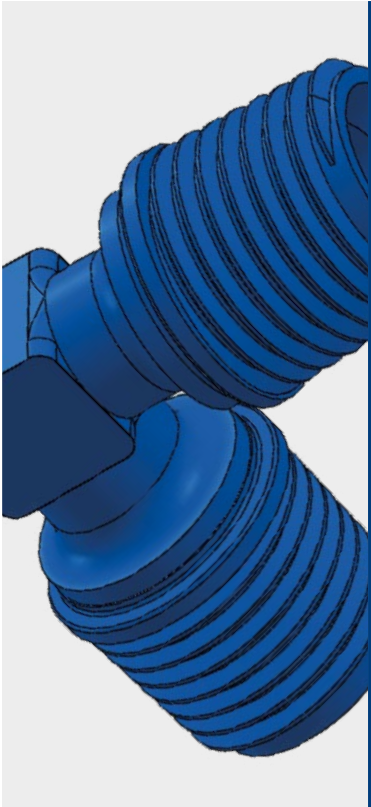

-20°C ÷ +110°C
Subject to applications



Working pressure:
14 Bar (at 20°C)
Depending on the tube used



Compressed air, water and
fluids suitable with construction
materials



- Taper gas BSPT ISO 7
from R1/8" to R3/4"
- NPT
from N1/8" to N3/4"



Body: Nylon 66

FEATURES

The fittings of this series have plastic thread and consequently we recommend to avoid excessive force during screwing and to teflon the thread before use in order to prevent any type of loss.



Food contact materials
EC 1935/2004



D.M. 174/2004




Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

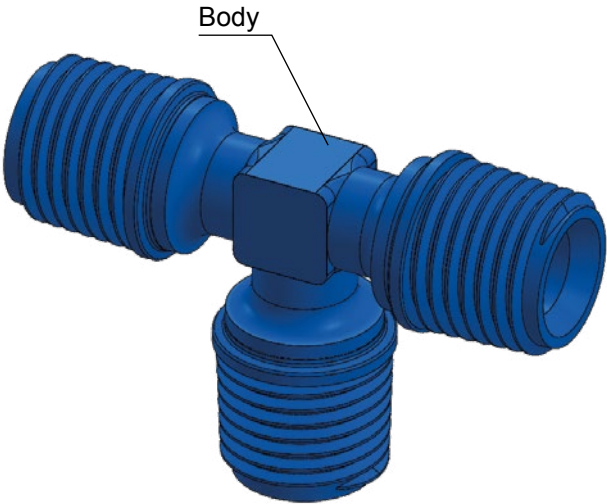


TIGHTENING TORQUE
TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"	3/4"
Nm	0,1	0,8	4	6	8



1800


Nipple BSPT thread



CODE	T	L	I	H	g
1800TR18	R 1/8"	23,2	8,0	11	1,4
1800TR14	R 1/4"	27,1	10,0	14	3,5
1800TR38	R 3/8"	28,2	10,0	17	4,2
1800TR12	R 1/2"	34,1	12,5	22	8,0
1800TR34	R 3/4"	36,0	-	27	-

1802


Reduced nipple BSPT thread



CODE	T1	T2	I1	I2	L	H	g
1802TR1418	R 1/4"	R 1/8"	10,5	8,5	25,2	14	2,5
1802TR3818	R 3/8"	R 1/8"	10,0	8,0	27,1	17	3,8
1802TR3814	R 3/8"	R 1/4"	10,0	10,0	28,5	17	4,1
1802TR1214	R 1/2"	R 1/4"	13,0	10,5	31,5	22	6,7
1802TR1238	R 1/2"	R 3/8"	13,0	10,5	31,5	22	6,0
1802TR3412	R 3/4"	R 1/2"	-	-	34,5	27	-

1810


Male elbow BSPT thread



CODE	T	I	L	H	g
1810TR18	R 1/8"	8,0	20,0	10	3,0
1810TR14	R 1/4"	10,0	22,0	10	4,0
1810TR38	R 3/8"	10,0	24,0	14	7,0
1810TR12	R 1/2"	12,5	32,0	17	15,0

1812

Reduced male elbow BSPT thread




CODE	T1	T2	I1	I2	L1	L2	H	g
1812TR1418	R 1/4"	R 1/8"	10,0	8,0	22,0	20,0	12	3,6
1812TR3814	R 3/8"	R 1/4"	10,0	10,0	24,0	24,0	15	6,5
1812TR1238	R 1/2"	R 3/8"	12,5	10,0	32,0	29,5	17	13,0



1820

Adapter M/F BSPT thread



CODE	T1	T2	I1	I2	L	H	g
1820TR1818	R 1/8"	R 1/8"	9,0	8,0	23,0	14	1,0
1820TR1414	R 1/4"	R 1/4"	10,5	10,0	24,0	17	3,0
1820TR3838	R 3/8"	R 3/8"	11,0	10,5	25,7	22	5,3
1820TR1212	R 1/2"	R 1/2"	13,5	13,0	30,6	26	9,0

REDUCED ADAPTER M/F BSPT THREAD


1820TR1814	R 1/8"	R 1/4"	10,5	10,0	23,0	14	2,4
1820TR1838	R 1/8"	R 3/8"	9,0	10,0	24,0	14	2,7
1820TR1812	R 1/8"	R 1/2"	9,0	12,0	27,0	14	4,1
1820TR1438	R 1/4"	R 3/8"	10,5	10,0	24,8	17	5,0
1820TR1412	R 1/4"	R 1/2"	10,5	10,0	27,2	17	4,8
1820TR3812	R 3/8"	R 1/2"	11,0	13,0	28,2	22	8,0

ENLARGER ADAPTER M/F BSPT THREAD

1820TR1418	R 1/4"	R 1/8"	10,5	8,0	22,1	17	2,8
1820TR3818	R 3/8"	R 1/8"	11,0	8,0	23,1	22	4,8
1820TR3814	R 3/8"	R 1/4"	11,0	10,0	25,2	22	5,1
1820TR1218	R 1/2"	R 1/8"	13,5	8,0	25,6	26	7,0
1820TR1214	R 1/2"	R 1/4"	13,5	10,0	27,3	26	7,2
1820TR1238	R 1/2"	R 3/8"	13,5	10,0	28,0	26	8,0

1825


Female sleeve BSPT thread



CODE	T	I	L	H	g
1825TR18	R 1/8"	9,0	20,0	14	2,3
1825TR14	R 1/4"	11,0	23,6	17	3,7
1825TR38	R 3/8"	11,0	24,5	21	5,2
1825TR12	R 1/2"	13,5	29,7	26	9,6
1825TR34	R 3/4"	18,0	38,0	34	16,8

1827

Reduced female sleeve BSPT thread




CODE	T1	T2	I1	I2	L	H	g
1827TR1418	R 1/4"	R 1/8"	11,0	9,0	22,0	17	3,2
1827TR3818	R 3/8"	R 1/8"	11,0	9,0	24,5	21	5,2
1827TR3814	R 3/8"	R 1/4"	11,0	11,0	24,5	21	6,0
1827TR1214	R 1/2"	R 1/4"	13,5	11,0	27,0	26	8,0
1827TR1238	R 1/2"	R 3/8"	13,5	11,0	27,0	26	7,7
1827TR3414	R 3/4"	R 1/4"	13,5	11,0	30,1	34	11,0
1827TR3412	R 3/4"	R 1/2"	13,5	11,0	35,0	34	14,5



1830


Male tee BSPT thread

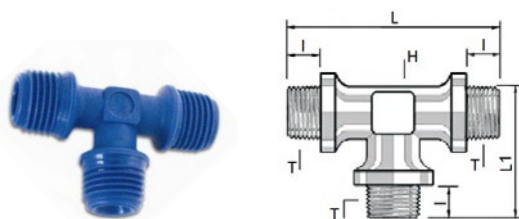

CODE	T	I	L	L1	H	g
1830TR18	R 1/8"	8,0	39,8	24,1	12	4,0
1830TR14	R 1/4"	10,0	44,0	26,2	12	5,0
1830TR38	R 3/8"	10,0	50,5	32,0	15	10,0
1830TR12	R 1/2"	12,5	64,0	40,3	17	22,0

1832


Reduced male tee BSPT thread

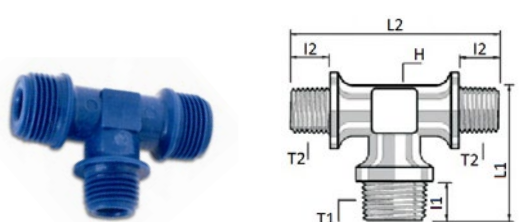

CODE	T1	T2	I1	I2	L1	L2	H	g
1832TR1814	R 1/8"	R 1/4"	8,0	10,0	26,4	39,7	12	4,4
1832TR1438	R 1/4"	R 3/8"	10,0	10,0	38,2	43,3	15	9,3
1832TR3812	R 3/8"	R 1/2"	10,0	12,5	40,4	60,2	17	17,3
ENLARGER MALE TEE BSPT THREAD								
1832TR1418	R 1/4"	R 1/8"	10,0	8,0	24,2	43,3	12	5,6
1832TR3814	R 3/8"	R 1/4"	10,0	10,0	26,4	60,2	15	9,7
1832TR1238	R 1/2"	R 3/8"	12,5	10,0	38,2	64,2	17	17,0

1834


Lateral reduced male tee BSPT thread

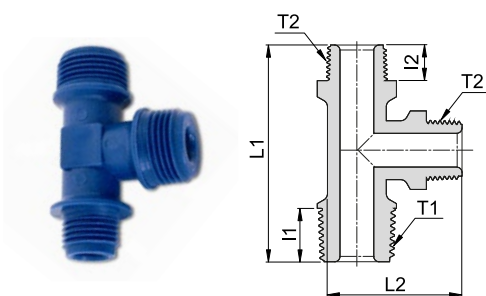

CODE	T1	T2	I1	I2	L1	L2	g
1834TR1814	R 1/8"	R 1/4"	8,0	10,0	42,7	25,5	5,0
1834TR1438	R 1/4"	R 3/8"	10,0	10,0	48,5	31,0	9,5
1834TR3812	R 3/8"	R 1/2"	10,0	12,5	62,0	38,2	19,0
LATERAL ENLARGER MALE TEE BSPT THREAD							
1834TR1418	R 1/4"	R 1/8"	10,0	8,0	41,8	26,3	4,9
1834TR3814	R 3/8"	R 1/4"	10,0	10,0	48,3	30,8	8,8
1834TR1238	R 1/2"	R 3/8"	12,5	10,0	62,0	40,0	17,9

1840

M/F reducer BSPT thread

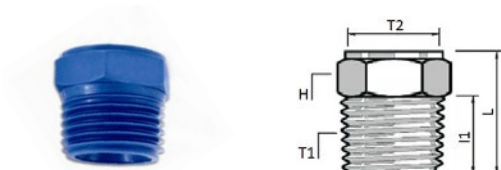


CODE	T1	T2	I1	L	H	g
1840TR1418	R 1/4"	R 1/8"	10,0	17,2	14	1,5
1840TR3818	R 3/8"	R 1/8"	10,5	17,8	17	2,7
1840TR3814	R 3/8"	R 1/4"	10,5	17,8	17	2,1
1840TR1218	R 1/2"	R 1/8"	12,5	20,7	22	6,0
1840TR1214	R 1/2"	R 1/4"	12,5	20,4	22	5,5
1840TR1238	R 1/2"	R 3/8"	12,5	20,7	22	3,8
1840TR3414	R 3/4"	R 1/4"	13,5	22,0	27	8,9
1840TR3438	R 3/4"	R 3/8"	13,5	22,2	27	8,1
1840TR3412	R 3/4"	R 1/2"	13,5	22,4	27	7,0



1850


Male plug BSPT thread



CODE	T	I	L	H	g
1850TR18	R 1/8"	9,0	13,6	11	1,0
1850TR14	R 1/4"	10,5	16,6	14	2,0
1850TR38	R 3/8"	10,5	16,1	17	3,0
1850TR12	R 1/2"	12,5	19,6	22	5,0
1850TR34	R 3/4"	15,0	22,0	27	8,0
1850TR1	R 1"	20,0	27,0	36	-

1855


Female plug BSPT thread



CODE	T	I	L	H	g
1855TR18	R 1/8"	9,0	10,4	13	1,1
1855TR14	R 1/4"	10,0	14,2	17	1,2
1855TR38	R 3/8"	11,0	14,2	20	2,7
1855TR12	R 1/2"	13,5	17,1	24	4,3
1855TR34	R 3/4"	14,0	17,1	30	6,2

1875

Nut BSPT thread




CODE	T	S	H	g	COLOURS
1875TR14	G 1/4"	5,0	17	1,1	BLACK
1875TR12	G 1/2"	11,6	26	1,2	BLUE



1800N


Nipple NPT thread



CODE	T	I	H	g
1800TRN18	N 1/8"	11	23,9	1,4
1800TRN14	N 1/4"	14	32,7	2,79
1800TRN38	N 3/8"	17	34,4	4,85
1800TRN12	N 1/2"	22	43,3	8,75
1800TRN34	N 3/4"	27	44,4	12,44

1802N


Reduced nipple NPT thread



CODE	T1	T2	H	L	g
1802TRN1418	N 1/4"	N 1/8"	14	28,4	2,3
1802TRN3818	N 3/8"	N 1/8"	17	29,6	3,8
1802TRN1218	N 1/2"	N 1/8"	22	34,9	6,4
1802TRN3418	N 3/4"	N 1/8"	27	35,4	9,1
1802TRN3814	N 3/8"	N 1/4"	17	33,4	4,17
1802TRN1214	N 1/2"	N 1/4"	22	38,7	6,9
1802TRN3414	N 3/4"	N 1/4"	27	39,4	9,5
1802TRN1238	N 1/2"	N 3/8"	22	39,1	7,6
1802TRN3438	N 3/4"	N 3/8"	27	39,6	10,2
1802TRN3412	N 3/4"	N 1/2"	27	44,1	11,4

1810N


Male elbow NPT thread



CODE	T	L	g
1810TRN18	N 1/8"	23,8	2,2
1810TRN14	N 1/4"	28,4	3,3

1812N

Reduced male elbow NPT thread




CODE	T1	T2	L1	L2	g
1812TRN1418	N 1/4"	N 1/8"	28,4	24,0	2,9



1820N

M/F adapter NPT thread

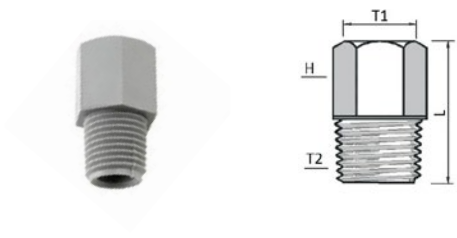

CODE	T1	T2	H	L	g
1820TRN1818	N 1/8"	N 1/8"	14	23,4	2,2
1820TRN1414	N 1/4"	N 1/4"	17	30,7	3,8
1820TRN3838	N 3/8"	N 3/8"	22	30,4	5,95
1820TRN1212	N 1/2"	N 1/2"	26	39,0	5,77

REDUCED M/F ADAPTER NPT THREAD


1820TRN1814	N 1/8"	N 1/4"	14	23,4	2,55
1820TRN1838	N 1/8"	N 3/8"	14	27,4	3,13
1820TRN1812	N 1/8"	N 1/2"	14	32,5	4,66
1820TRN1438	N 1/4"	N 3/8"	17	30,5	4,23
1820TRN1412	N 1/4"	N 1/2"	17	35,5	5,8
1820TRN3812	N 3/8"	N 1/2"	22	35,5	7,66

ENLARGER M/F ADAPTER NPT THREAD

1820TRN1418	N 1/4"	N 1/8"	17	26,5	3,17
1820TRN3818	N 3/8"	N 1/8"	22	26,3	5,06
1820TRN3814	N 3/8"	N 1/4"	22	26,5	5,68
1820TRN1218	N 1/2"	N 1/8"	26	30,0	7,73
1820TRN1214	N 1/2"	N 1/4"	26	34,0	8,04
1820TRN1238	N 1/2"	N 3/8"	26	36,6	8,66

1825N


Female sleeve NPT thread

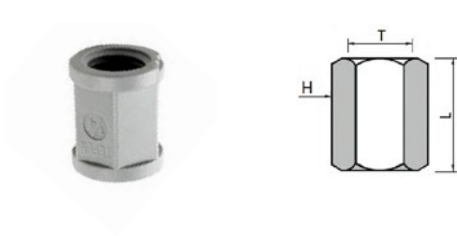

CODE	T	H	L	g
1825TRN18	N 1/8"	14	19,7	2,3
1825TRN14	N 1/4"	17	23,5	3,7
1825TRN38	N 3/8"	22	24,6	5,2
1825TRN12	N 1/2"	27	29,5	9,7

1827N

Reduced female sleeve NPT thread

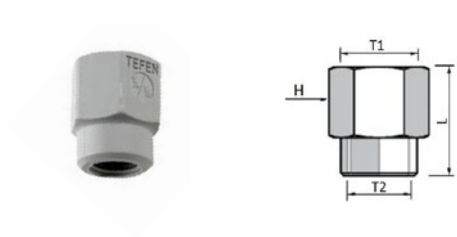


CODE	T1	T2	H	L	g
1827TRN1418	N 1/4"	N 1/8"	17	22,0	3,2
1827TRN3818	N 3/8"	N 1/8"	22	24,4	4,9
1827TRN3814	N 3/8"	N 1/4"	22	24,8	4,83
1827TRN1214	N 1/2"	N 1/4"	26	27,0	7,4
1827TRN1238	N 1/2"	N 3/8"	26	26,8	7,8



1830N


Male tee NPT thread



CODE	T	L	L1	g
1830TRN18	N 1/8"	39,3	24,0	3,2
1830TRN14	N 1/4"	48,4	28,5	4,8

1832N


Reduced male tee NPT thread



CODE	T1	T2	L1	L2	g
1832TRN1418	N 1/8"	N 1/4"	48,4	24,0	4,2

1840N


M/F reduced NPT thread



CODE	T1	T2	H	L	g
1840TRN1418	N 1/4"	N 1/8"	15	21,0	1,78
1840TRN3818	N 3/8"	N 1/8"	18	20,8	3,3
1840TRN3814	N 3/8"	N 1/4"	19	20,8	2,4
1840TRN1218	N 1/2"	N 1/8"	24	27,2	6,98
1840TRN1214	N 1/2"	N 1/4"	19	27,1	6,65
1840TRN1238	N 1/2"	N 3/8"	29	27,2	5,55
1840TRN3414	N 3/4"	N 1/4"	29	27,0	10,44
1840TRN3438	N 3/4"	N 3/8"	29	27,2	9,85
1840TRN3412	N 3/4"	N 1/2"	29	27,3	7,9

1850N

Male plug NPT thread



CODE	T	H	L	g
1850TRN18	N 1/8"	11	14,7	1,1
1850TRN14	N 1/4"	14	19,4	2
1850TRN38	N 3/8"	17	20,4	3,3
1850TRN12	N 1/2"	22	25,6	6
1850TRN34	N 3/4"	27	26,0	8,7

