




-5°C ÷ 60°C

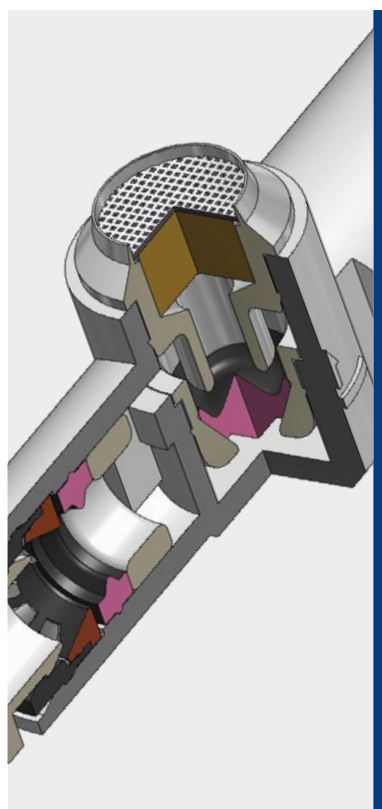

Working pressure:
10 Bar

Min. working pressure:
1 Bar

Pressure peaks do not exceed the
max working pressure



Compressed air



Polyamide PA,
polyurethane PU,
polyethylene PE

Body: PA66

Mesh: Stainless steel AISI 301

Back ring: PA66

Seal: NBR



Lock claw: Stainless steel AISI 301

Collar: PA66

Seat ring: Brass

Holder: POM

Collet: PA66

Filter: PE

Housing: Brass

Valve: NBR

SILICONE FREE




Products in compliance with
EC Regulation 1907/2006

RoHS3

Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

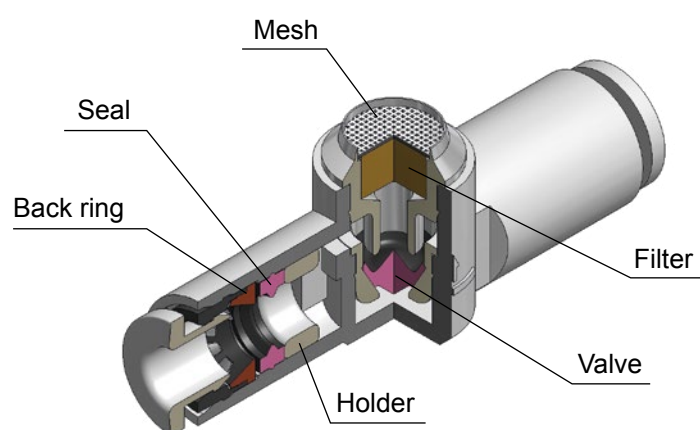


PLUS - MEVU

Silenced exhaust to the atmosphere
through the incorporated silencer.

Easy assembly thanks to push-in fittings
incorporated.

Suitable for multiple applications thanks
to light weight and compact size.

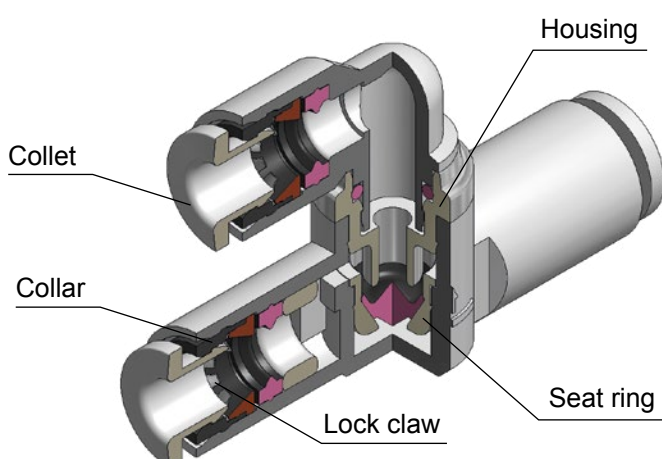

PLUS - MEVS

Connection exhaust to be conveyed.



Easy assembly thanks to push-in fittings
incorporated.

Suitable for multiple applications thanks
to the light weight and compact size.



MEVU

Quick exhaust valve with silencer

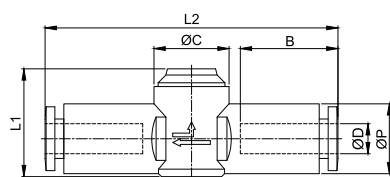



CODE	ØD	ØP	ØC	B	L1	L2	g
MEVU04W	4	9,3	10	13,0	14,4	39,0	4,5
MEVU06W	6	11,5	10	14,5	15,9	41,7	5,5

Section in mm²

CODE	Ø TUBE (mm)	IN - OUT	OUT - EXHAUST
MEVU04W	4	1,7	2,5
MEVU06W	6	2,4	2,7

MEVS

Quick exhaust valve with push-in fittings

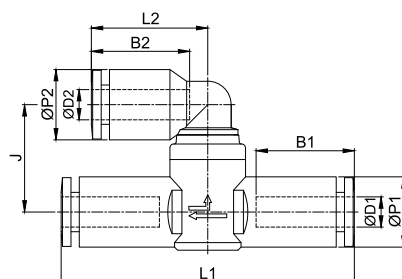

CODE	ØD1	ØD2	B1	B2	ØP1	ØP2	L1	L2	J	g
MEVS04W	4	4	13,0	13,0	9,3	9,3	39,0	15,4	14,2	5,9
MEVS06W	6	6	14,5	14,5	11,5	11,5	41,7	17,3	15,6	7,5

Section in mm²

CODE	Ø TUBE (mm)	IN - OUT	OUT - EXHAUST
MEVS04W	4	1,7	2,5
MEVS06W	6	2,4	2,7

