




0°C ÷ 60°C environment
 0°C ÷ 25°C water
 0°C ÷ 90°C water (3/5 min)
 ON/OFF



Working pressure:
 from 0,2 to 10 Bar
 Bursting pressure:
 80 Bar

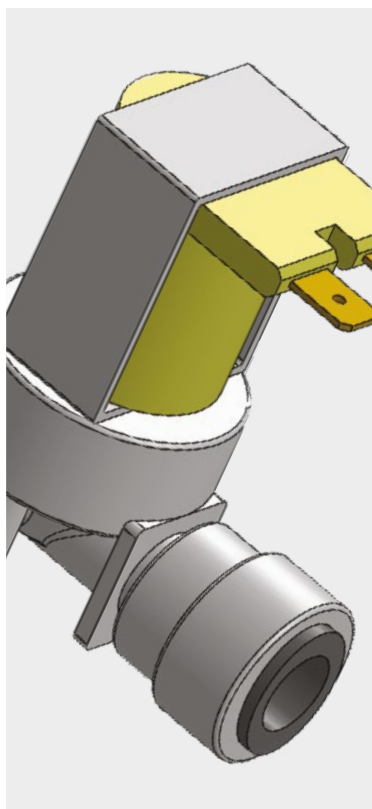

Water and fluids suitable with
 construction materials



Parallel gas BSPP 228
 from G1/4" to G2"

ELECTRICAL CONNECTION

Faston connectors 6,3 mm

Body: Nylon (PA66)

Plate: Nylon (PA66)

Guide tube: Nylon (PA66)

diaphragm: Sunaflex T8157

Inlet restrictor washer:

Sunaflex T8157

Outlet restrictor washer:

Sunaflex T8157

Inlet filter: POM

Inlet restrictor: POM

Outlet restrictor: POM

Piston: Stainless steel

Spring: Stainless steel



WRAS approved product




Products in compliance with
 EC Regulation 1907/2006




Products in compliance with
 the directive EU 2015/863

VIEW - SOLENOID VALVE SVP2-CIR-IR

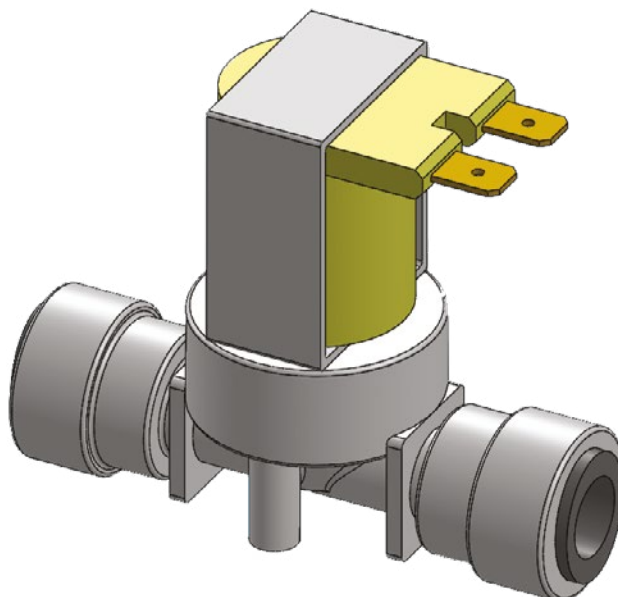

SVP2CIR-IR

Nylon solenoid valve tube - tube 2/2-ways NC, metric tube

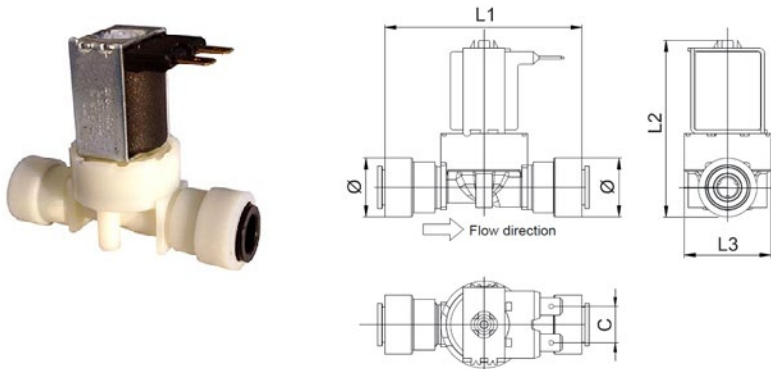

CODE	Ø	INLET CONNECTION	OUTLET CONNECTION	L1	L2	L3	C	FIXING	VOLTAGE
SVP2CIR10IR10M1	21	PUSH-IN SYSTEM Ø10	PUSH-IN SYSTEM Ø10	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CIR10IR10M2	21	PUSH-IN SYSTEM Ø10	PUSH-IN SYSTEM Ø10	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CIR10IR10M5	21	PUSH-IN SYSTEM Ø10	PUSH-IN SYSTEM Ø10	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CIR10IR10M7	21	PUSH-IN SYSTEM Ø10	PUSH-IN SYSTEM Ø10	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CIR10IR10M9	21	PUSH-IN SYSTEM Ø10	PUSH-IN SYSTEM Ø10	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC


Nylon solenoid valve tube - tube 2/2-ways NC, inch tube

CODE	Ø	INLET CONNECTION	OUTLET CONNECTION	L1	L2	L3	C	FIXING	VOLTAGE
SVP2CIR3/8IR3/8M1	21	PUSH-IN SYSTEM 3/8"	PUSH-IN SYSTEM 3/8"	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CIR3/8IR3/8M2	21	PUSH-IN SYSTEM 3/8"	PUSH-IN SYSTEM 3/8"	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CIR3/8IR3/8M5	21	PUSH-IN SYSTEM 3/8"	PUSH-IN SYSTEM 3/8"	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CIR3/8IR3/8M7	21	PUSH-IN SYSTEM 3/8"	PUSH-IN SYSTEM 3/8"	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CIR3/8IR3/8M9	21	PUSH-IN SYSTEM 3/8"	PUSH-IN SYSTEM 3/8"	71,0	63,0	31,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC

The collet of the solenoid valve for inch tube is grey



SVP2CAL-IR Nylon solenoid valve, male BSPP thread - tube, 2/2 ways NC, metric tube

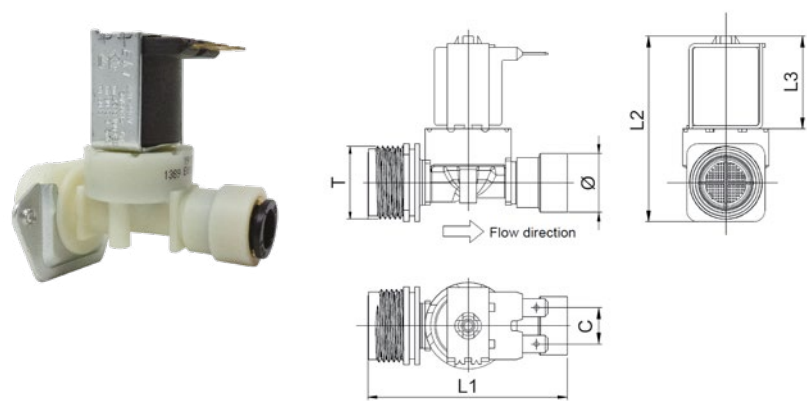

CODE	Ø	INLET CONNECTION (T)	OUTLET CONNECTION	L1	L2	L3	C	FIXING	VOLTAGE
SVP2CAL34IR10M1	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM Ø10	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CAL34IR10M2	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM Ø10	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CAL34IR10M5	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM Ø10	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CAL34IR10M7	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM Ø10	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CAL34IR10M9	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM Ø10	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC

Fixing: Universal bracket with M4 bores

Nylon solenoid valve, male BSPP thread - tube, 2/2 ways NC, inch tube

CODE	Ø	INLET CONNECTION (T)	OUTLET CONNECTION	L1	L2	L3	C	FIXING	VOLTAGE
SVP2CAL34IR3/8M1	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM 3/8"	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CAL34IR3/8M2	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM 3/8"	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CAL34IR3/8M5	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM 3/8"	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CAL34IR3/8M7	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM 3/8"	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CAL34IR3/8M9	21	BSPP THREAD G 3/4"	PUSH-IN SYSTEM 3/8"	71,0	67,0	33,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC


Fixing: Universal bracket with M4 bores

The collet of the solenoid valve for inch tube is grey



SVP2CM-M

Nylon solenoid valve, M/M BSPP thread, 2/2 ways NC

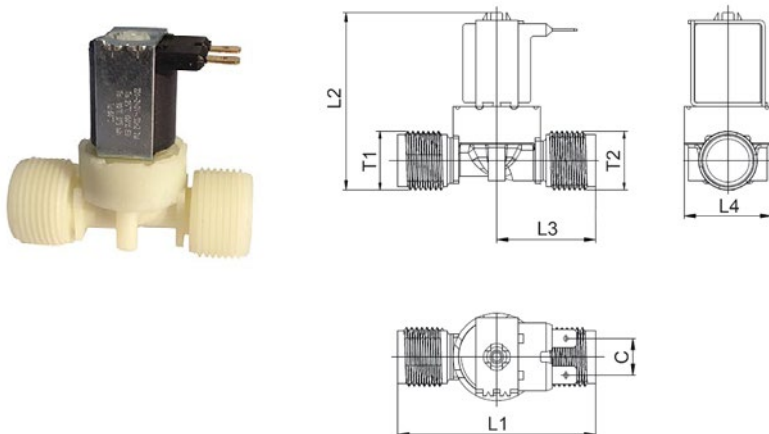


CODE	INLET CONNECTION (T1)	OUTLET CONNECTION (T2)	L1	L2	L3	L4	C	FIXING	VOLTAGE
SVP2CM38M38M1	BSPP THREAD G 3/8"	BSPP THREAD G 3/8"	64,0	60,5	31,9	31,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CM38M38M2	BSPP THREAD G 3/8"	BSPP THREAD G 3/8"	64,0	60,5	31,9	31,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CM38M38M5	BSPP THREAD G 3/8"	BSPP THREAD G 3/8"	64,0	60,5	31,9	31,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CM38M38M7	BSPP THREAD G 3/8"	BSPP THREAD G 3/8"	64,0	60,5	31,9	31,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CM38M38M9	BSPP THREAD G 3/8"	BSPP THREAD G 3/8"	64,0	60,5	31,9	31,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC
SVP2CM12M12M1	BSPP THREAD G 1/2"	BSPP THREAD G 1/2"	70,0	63,0	35,0	31,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CM12M12M2	BSPP THREAD G 1/2"	BSPP THREAD G 1/2"	70,0	63,0	35,0	31,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CM12M12M5	BSPP THREAD G 1/2"	BSPP THREAD G 1/2"	70,0	63,0	35,0	31,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CM12M12M7	BSPP THREAD G 1/2"	BSPP THREAD G 1/2"	70,0	63,0	35,0	31,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CM12M12M9	BSPP THREAD G 1/2"	BSPP THREAD G 1/2"	70,0	63,0	35,0	31,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC
SVP2CM34M34M1	BSPP THREAD G 3/4"	BSPP THREAD G 3/4"	69,0	63,5	34,0	31,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CM34M34M2	BSPP THREAD G 3/4"	BSPP THREAD G 3/4"	69,0	63,5	34,0	31,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CM34M34M5	BSPP THREAD G 3/4"	BSPP THREAD G 3/4"	69,0	63,5	34,0	31,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CM34M34M7	BSPP THREAD G 3/4"	BSPP THREAD G 3/4"	69,0	63,5	34,0	31,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CM34M34M9	BSPP THREAD G 3/4"	BSPP THREAD G 3/4"	69,0	63,5	34,0	31,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC



SVP2CAL-CL

Nylon solenoid valve, male BSPP thread - stem, 2/2 ways NC

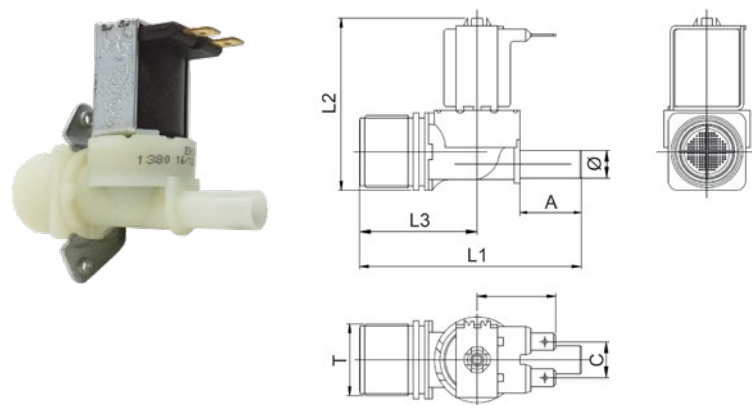

CODE	INLET CONNECTION (T)	OUTLET CONNECTION (Ø)	L1	L2	L3	A	C	FIXING	VOLTAGE
SVP2CAL34CL10M1	BSPP THREAD G 3/4"	STEM Ø10	80,0	62,0	42,5	22,0	13,0	2 BORES Ø 2,7mm	12V DC / AC
SVP2CAL34CL10M2	BSPP THREAD G 3/4"	STEM Ø10	80,0	62,0	42,5	22,0	13,0	2 BORES Ø 2,7mm	24V DC / AC
SVP2CAL34CL10M5	BSPP THREAD G 3/4"	STEM Ø10	80,0	62,0	42,5	22,0	13,0	2 BORES Ø 2,7mm	220/240V AC
SVP2CAL34CL10M7	BSPP THREAD G 3/4"	STEM Ø10	80,0	62,0	42,5	22,0	13,0	2 BORES Ø 2,7mm	110V AC
SVP2CAL34CL10M9	BSPP THREAD G 3/4"	STEM Ø10	80,0	62,0	42,5	22,0	13,0	2 BORES Ø 2,7mm	BISTABLE 5,5 - 12V DC

