




NBR: -5°C ÷ 70°C
EPDM: -40°C ÷ 140°C



Working pressure:
from 0,5 to 10 Bar
Min. opening pressure:
0,025 Bar
Max. opening pressure:
0,07 Bar

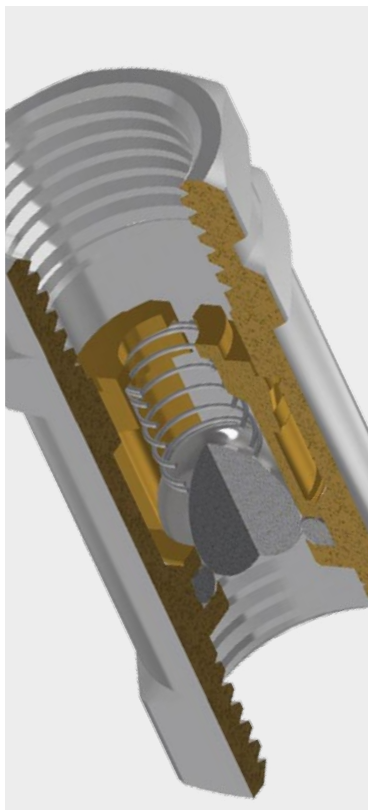

Compressed air and fluids
suitable with construction
materials



Fluid flow in one direction
only. Flow direction marked
on the body



- Parallel gas BSPP ISO 228
from G1/8" to G1/2"
- Metric ISO 262
M5



Body: Nickel-plated brass
Shutter with ball: Stainless steel
AISI 304
Spring: Stainless steel AISI 302
O-ring: NBR 70

PLUS

Made with a ball shutter, which guarantees
the advantage of eliminating the friction
of the components and, at the same time,
increases the lifetime.

SILICONE FREE




Products in compliance with
EC Regulation 1907/2006

RoHS3


Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

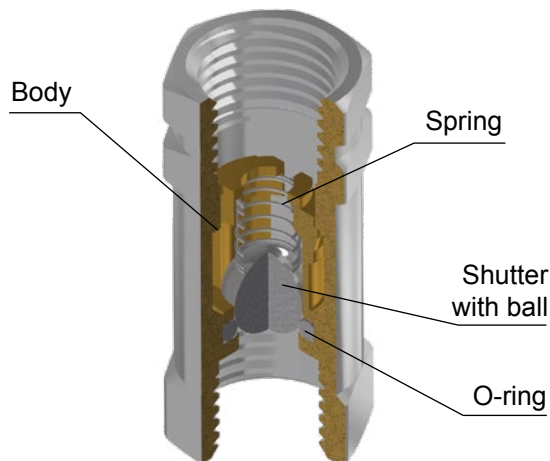

1700L

Female check valve BSPP & metric thread



CODE	T1	T2	ØD	L	A	CH	g
1700TRM5L	M5x0,8	M5x0,8	2,8	24,0	6,0	10	13,0
1700TR18L	G 1/8"	G 1/8"	5,0	31,0	8,0	13	28,0
1700TR14L	G 1/4"	G 1/4"	7,0	37,0	9,5	16	35,0
1700TR38L	G 3/8"	G 3/8"	8,5	42,0	10,5	20	59,0
1700TR12L	G 1/2"	G 1/2"	10,0	50,0	21,0	25	78,0

