




-15°C ÷ +80°C



Working pressure:
16 Bar (High Flow)
12 Bar (Light Flow)

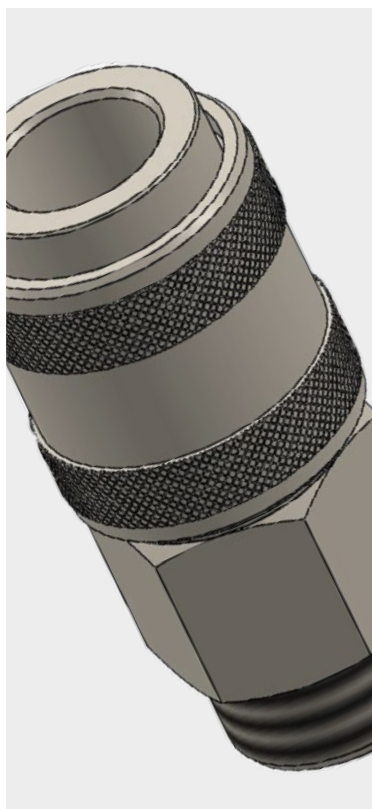

- Taper gas BSPT ISO 7
from R1/4" to R1/2"
- Parallel gas BSPP ISO 228
from G1/4" to G1/2"




Compressed air



High Flow: Nickel-plated brass
with 6 stainless steel spheres
Light Flow: Nickel-plated brass

PROFILE - TIERRE UNIVERSAL SERIES

The 8400 Series multi-socket allows 4 different profiles to be used while managing a single quick coupling. A simple solution for handling profiles that are not compatible with each other.

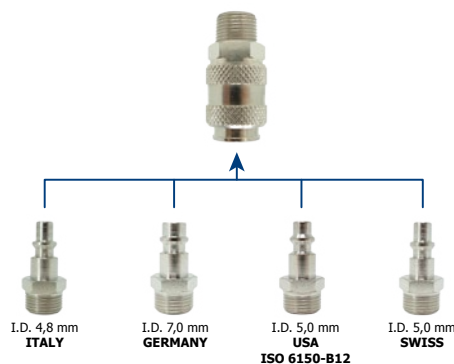


Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863


AIR FLOWRATE - HIGH FLOW TIERRE UNIVERSAL SERIES

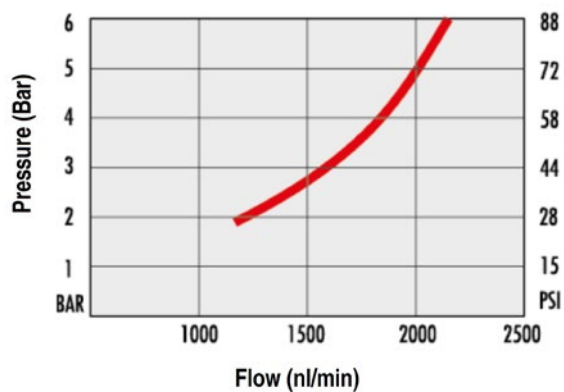

AIR FLOWRATE - LIGHT FLOW TIERRE UNIVERSAL SERIES - 8410FM-LU & 8420FF-LU

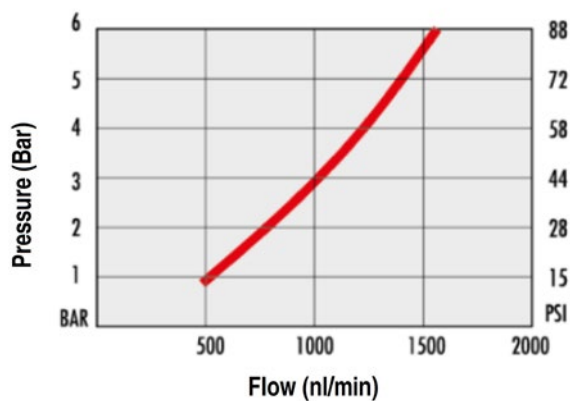


VIEW - QUICK COUPLING 8410FM

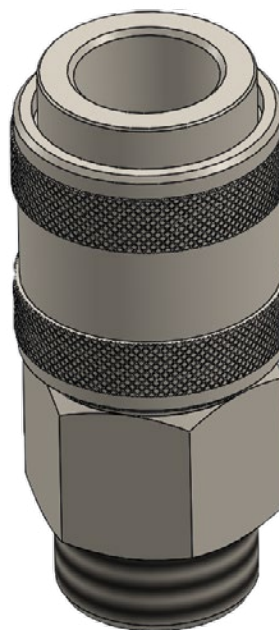

8410FM


Male quick coupling BSPT thread



CODE	T	I	D	L	H
8410FM02	R 1/4"	11,0	24,0	58,0	20
8410FM03	R 3/8"	11,5	24,0	54,0	20
8410FM04	R 1/2"	14,0	24,0	56,5	22

8420FF


Female quick coupling BSPP thread



CODE	T	I	D	L	H
8420FF02	G 1/4"	11,0	24,0	51,0	20
8420FF03	G 3/8"	12,0	24,0	51,0	20
8420FF04	G 1/2"	14,0	28,0	55,0	25

8430RE


Quick coupling with barb connector



CODE	INT. TUBE Ø	I	BARB	D	L	H
8430RE06	6	20,0	6,5	24,0	67,0	20
8430RE08	8	20,0	9,0	24,0	67,0	20
8430RE10	10	20,0	11,5	24,0	67,0	20
8430RE12	12	24,0	13,5	24,0	71,0	20

8440PO

Quick coupling with hose connector




CODE	Ø	D	L1	L2	H
8440PO610	6x10	24	47,0	73,0	20
8440PO612	6x12	24	47,0	73,0	20
8440PO614	6x14	24	47,0	73,5	20
8440PO812	8x12	24	47,0	73,0	20
8440PO814	8x14	24	47,0	73,5	20
8440PO817	8x17	24	47,0	73,5	20
8440PO10145	10x14,5	24	47,0	73,5	20
8440PO1017	10x17	24	47,0	73,5	20
8440PO1019	10x19	24	47,0	77,0	20



8450MO


Quick coupling with push-on connector and spring

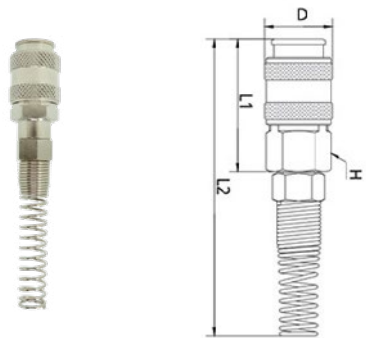

CODE	Ø	D	L1	L2	H
8450MO58	5x8	24,0	47,0	148,0	20
8450MO68	6x8	24,0	47,0	148,0	20
8450MO6510	6,5x10	24,0	47,0	148,0	20
8450MO810	8x10	24,0	47,0	148,0	20
8450MO812	8x12	24,0	38,0	155,0	20
8450MO1012	10x12	24,0	38,0	155,0	20

8410FM-LU


Male quick coupling BSPP thread - LIGHT FLOW

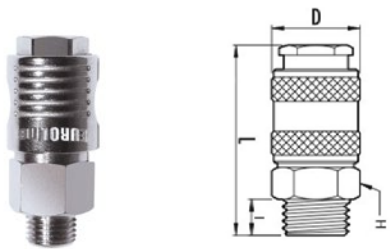

CODE	T	I	D	L	H
8410FM02LU	G 1/4"	9,0	22,0	46,0	19
8410FM03LU	G 3/8"	9,0	22,0	47,5	19
8410FM04LU	G 1/2"	10,5	22,0	48,5	22

8420FF-LU

Female quick coupling BSPP thread - LIGHT FLOW

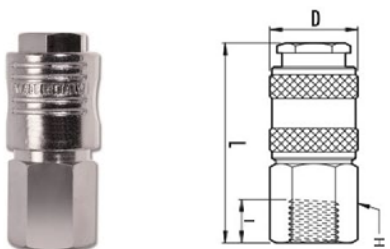

CODE	T	I	D	L	H
8420FF02LU	G 1/4"	11,0	22,0	52,5	19
8420FF03LU	G 3/8"	12,0	22,0	52,5	19

