




0°C ÷ 90°C



Working pressure:
from G3/8" to G1": 16 Bar
from G1"-1/4" to G2": 10 Bar
from G2"-1/2" to G4": 8 Bar

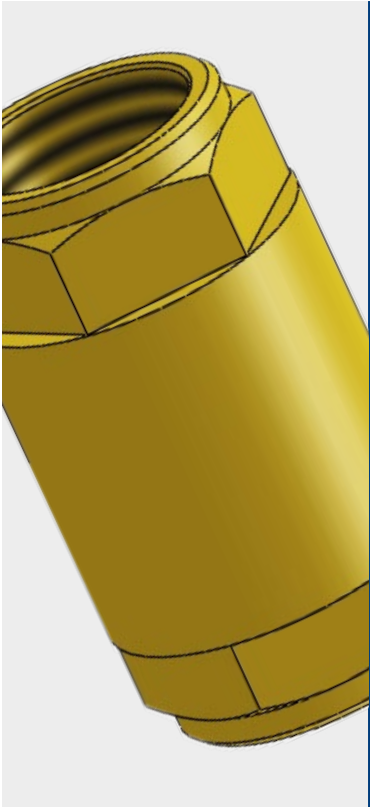

Air, neutral gases and water



Fluid flow in one direction only. Flow direction marked on the body



Parallel gas BSPP ISO 228
from G3/8" to G4"



Body: Yellow brass CW617N
UNI EN 12165/98

Body end: Nickel-plated brass
CW617N UNI EN 12165/98

Shutter: Acetal resin

Spring: Stainless steel AISI 302

Seal: NBR

AVAILABILITY

Available on request with shutter in stainless steel AISI 304





Products in compliance with
EC Regulation 1907/2006





Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

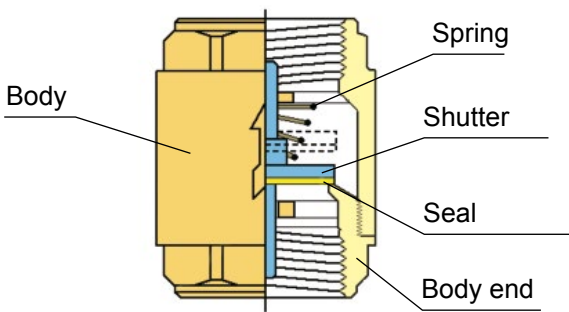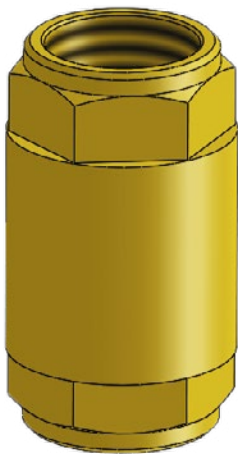

1705L

Check valve BSPP thread - yellow brass



CODE	T	F	I	L	g
1705TR38L	G 3/8"	12	29	46,0	35,0
1705TR12L	G 1/2"	12	30	48,0	110,0
1705TR34L	G 3/4"	14	37	53,0	150,0
1705TR11L	G 1"	15	44	59,0	240,0
1705TR114L	G 1"-1/4"	14	56	66,0	360,0
1705TR112L	G 1"-1/2"	15	63	71,0	480,0
1705TR2L	G 2"	14	78	80,0	700,0
1705TR212L	G 1"-1/2"	16	103	93,0	380,0
1705TR3L	G 3"	18	120	104,0	850,0
1705TR4L	G 4"	20	155	115,0	1050,0

