




0°C ÷ 60°C

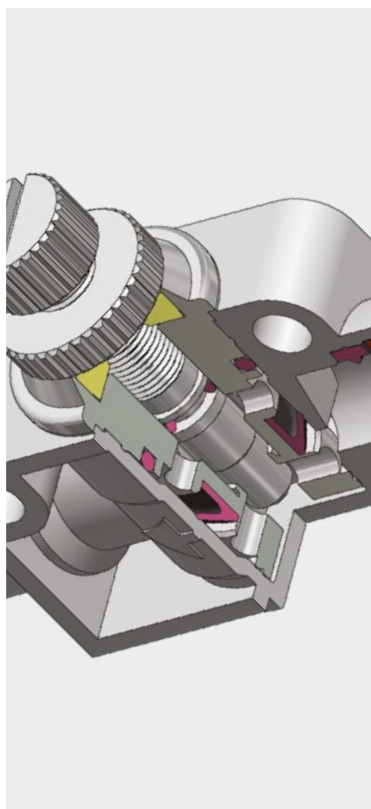

Working pressure:

10 Bar

Negative pressure:

- 0,95 Bar (- 95 kPa)

Pressure peaks do not exceed the max working pressure



Compressed air & vacuum
(do not use with water)



Polyamide PA,
Polyurethane PU,
Polyethylene PE



Manual flow regulation and
screwdriver



Body: PA66 & Nickel-plated brass

Collet: PA66

Collar: PA66

Lock claw: Stainless steel AISI 301

Back ring: POM

Seal: NBR

O-ring: NBR

Handle: Nickel-plated brass

Lock nut: Nickel-plated brass

SILICONE FREE




Products in compliance with
EC Regulation 1907/2006

RoHS3


Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

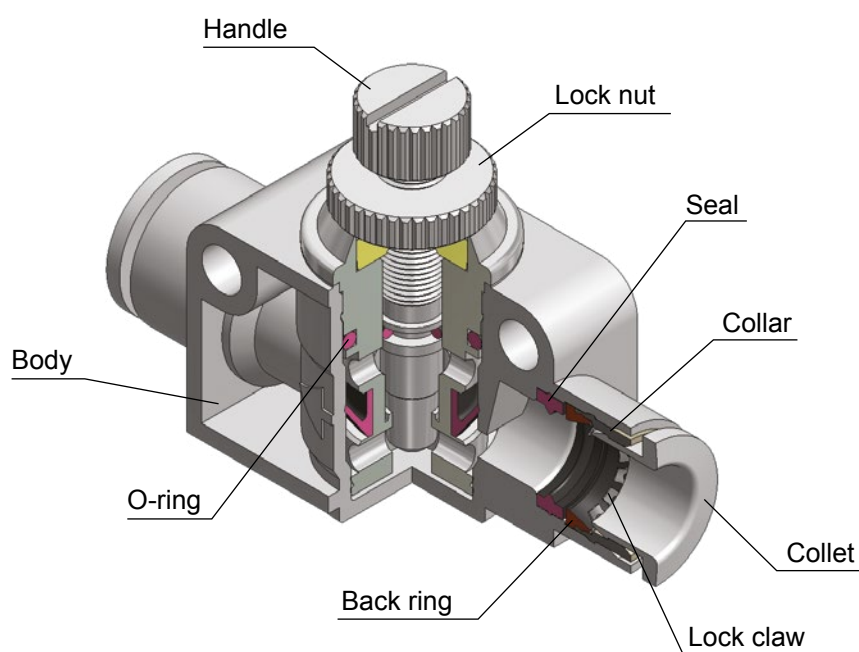

MSF

Unidirectional flat flow regulator, in technopolymer, with handle regulation

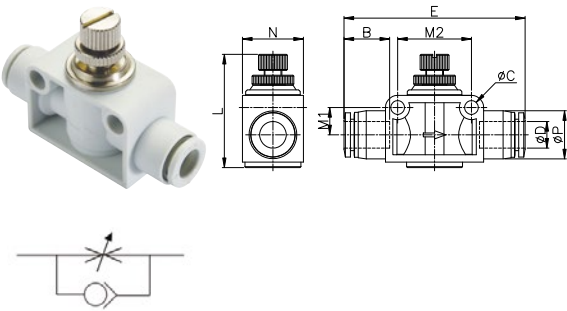

CODE	ØD	ØP	L MIN	L MAX	E	N	ØC	B	M1	M2
MSF04	4	9,5	26,4	28,9	38,8	11,0	3,2	13,4	5,4	15,4
MSF06	6	11,5	33,5	37,9	46,5	15,0	4,3	15,0	7,8	20,4
MSF08	8	13,6	35,5	41,5	53,1	18,0	4,3	17,1	8,5	23,0
MSF10	10	16,4	40,7	48,7	60,4	22,5	4,3	18,9	10,6	27,6
MSF12	12	19,5	45,0	53,5	70,8	26,5	4,3	21,4	11,9	32,4

