




NBR: -10°C ÷ 95°C
FKM: -20°C ÷ 205°C
Standard version: NBR



Working pressure:
0-12 Bar (suggested)
20 Bar (max)

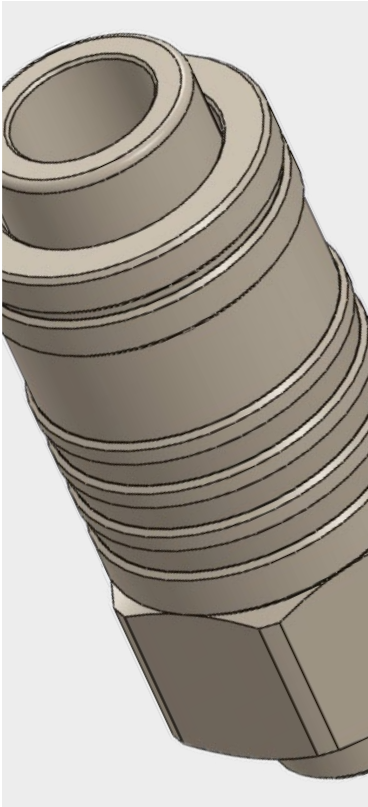

Compressed air and fluids
suitable with construction
materials



- Taper gas BSPT ISO 7 R1/8"
- Parallel gas BSPP ISO 228 G1/8"
- Metric ISO 262 M5


NOMINAL DIAMETER

2,5 mm

FLOWRATE

135 l/min

CONFIGURATIONS



SO
Single
Shutter



Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863




COMPONENTS	MICRO
Body	Nickel-plated brass
Slide	Nickel-plated brass
Adapter	Nickel-plated brass
Valve	Nickel-plated brass
Spring	Stainless steel AISI 302
Ball	Stainless steel AISI 420
Retaining ring	Stainless steel AISI 302
Seal	NBR - FKM

CONNECTION	AMC
Body	Nickel-plated brass

FLOW CHART

Chart created considering a working pressure of 6 Bar with a pressure drop of 0.5 Bar and simple shut-off.

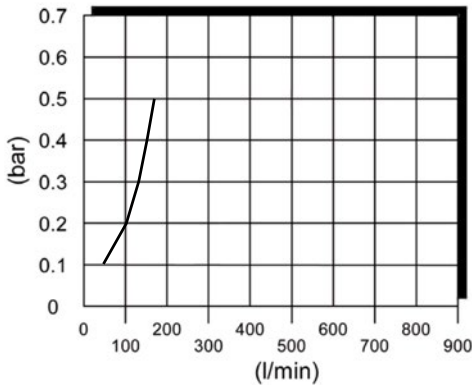


VIEW - QUICK COUPLING MICRO-M



MICRO-H


Female micro quick coupling BSPP & metric thread

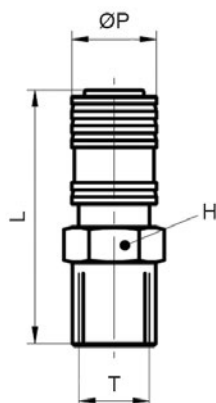

CODE	T	ØP	L	H
MICRO-HM5-L	M5x0,8	11,7	32,9	11
MICRO-H18-L	G 1/8"	11,7	35,4	12

AMC-H

Female micro connection BSPP thread



CODE	T	ØD	L	H
AMC-H18-L	G 1/8"	5	22,5	12

