




0°C ÷ 60°C



Working pressure:
10 Bar
Negative pressure:
- 0,95 Bar (- 99 Kpa)

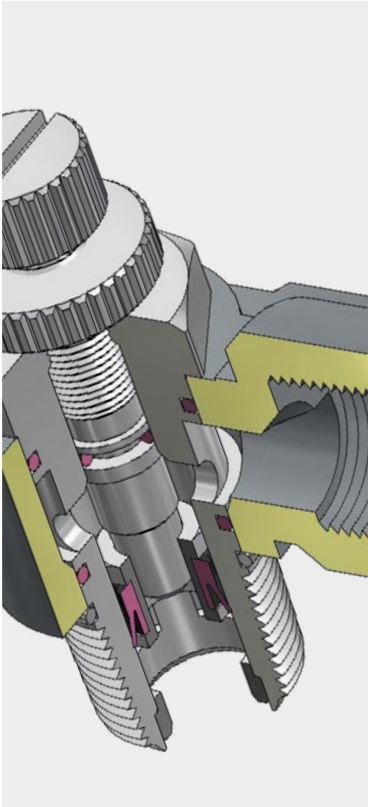

Compressed air & vacuum
(do not use with water)



Taper gas BSPT ISO 7
from R1/8" to R1/2" with teflon



Manual flow regulation and
screwdriver

Body: Nickel plated brass & Zinc

Back ring: NBR



Seal: NBR

O-ring: NBR

Handle: Nickel plated brass

Lock nut: Nickel plated brass

SILICONE FREE




Products in compliance with
EC Regulation 1907/2006


RoHS3

Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

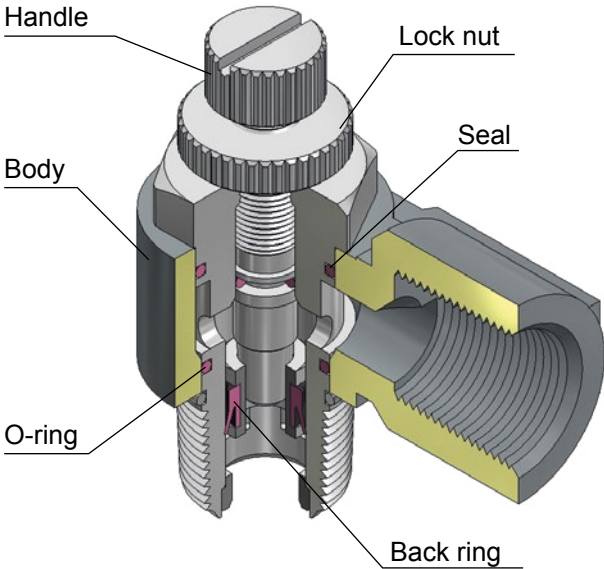

EXHAUST
(FOR CYLINDERS)




TIGHTENING TORQUE
TAPER GAS BSPT ISO 7

THREAD	1/8"	1/4"	3/8"	1/2"
Nm	7	12	22	28



NSCF

Unidirectional brass banjo flow regulator, BSPT thread for cylinders, with handle regulation

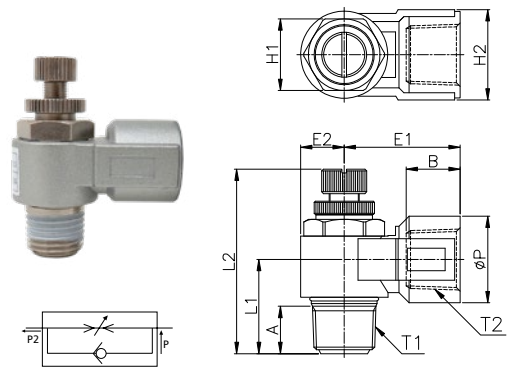

CODE	T1	T2	ØP	A	B	L1	L2 MIN	L2 MAX	E1	E2	H1	H2	g
NSCF-R01	R 1/8"	RC 1/8"	14.5	7.6	10.0	16.0	35.5	40.7	18.2	7.3	12	15	30.1
NSCF-R02	R 1/4"	RC 1/4"	18.0	10.6	13.0	21.1	40.3	46.6	26.5	9.5	15	19	60.2
NSCF-R03	R 3/8"	RC 3/8"	23.0	12.6	14.5	25.0	46.9	54.9	30.8	11.6	19	24	107.0
NSCF-R04	R 1/2"	RC 1/2"	26.5	14.5	19.0	29.1	54.0	60.1	38.7	14.0	24	28	170.1

