




-20°C ÷ 160°C

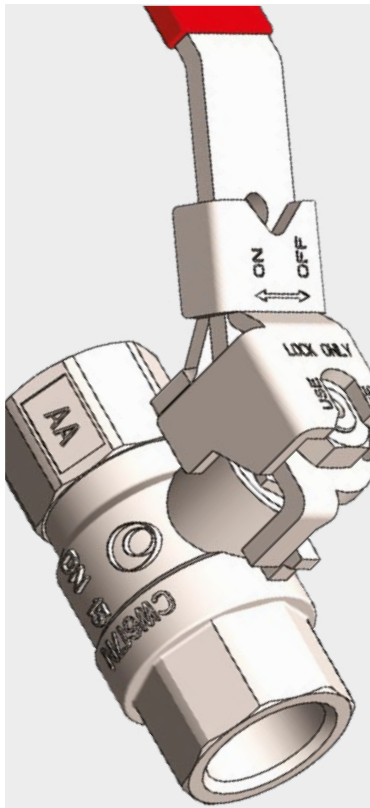

Working pressure:

50 Bar (from 1/4" to 3/4")

40 Bar (from 1" to 1-1/4")

32 Bar (from 1-1/2" to 2")



Compressed air, hydrothermal systems and fluids suitable with construction materials



Parallel gas BSPP ISO 228-1 from G1/4" to G2"

AVAILABILITY

Ball available in stainless steel AISI 304 on request

FEATURES

The anti blow-out system, found in the 9214 Series universal ball valves, guarantees greater protection against the accidental release of the stem and its sealing system.

Body: Nickel-plated brass

CW617N UNI EN 12165/98

Stem (anti blow-out): Brass

CW614N UNI EN 12164/98

Body end: Nickel-plated brass

CW617N UNI EN 12165/98

Ball: Chromed brass

CW617N UNI EN 12165/98

Seat: PTFE

O-ring: FKM

Handle: PVC coated steel


Nut: Zinc-plated steel

Stem seal: PTFE

Packing nut: Brass

CW614N UNI EN 12164/98

CONSTRUCTION DETAILS

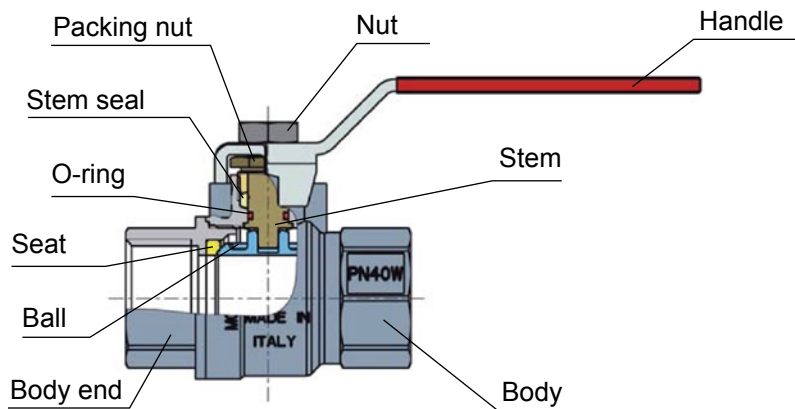

WRAS approved product



ACS approved product




Products in compliance with EC Regulation 1907/2006



Products in compliance with the directive EU 2015/863

PRESSURE-TEMPERATURE CHART

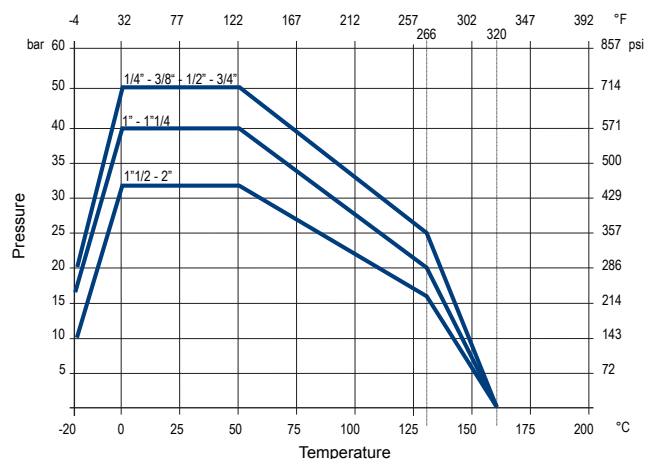


drawings and technical data are not binding & can be changed without notice



9214

Universal full bore lockable ball valve, female BSPP thread, red lever

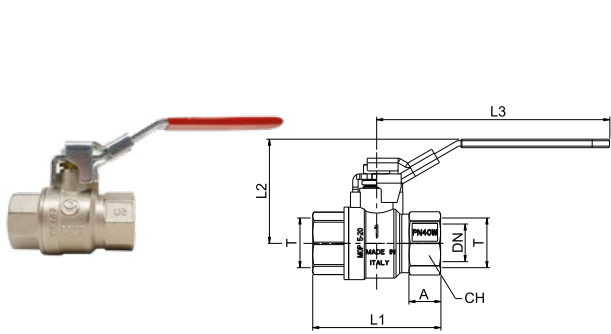

CODE	T	DN	A	L1	L2	L3	CH
9214TR14	G 1/4"	10	12	45,0	43,0	95,0	21
9214TR38	G 3/8"	10	12	45,0	44,0	95,0	21
9214TR12	G 1/2"	15	17	63,0	56,0	120,0	26
9214TR34	G 3/4"	20	19,5	71,0	60,0	120,0	31
9214TR1	G 1"	25	21	83,0	68,0	150,0	38
9214TR114	G 1-1/4"	32	22	92,0	73,0	150,0	48
9214TR112	G 1-1/2"	40	23,5	104,0	87,0	160,0	55
9214TR2	G 2"	50	28	124,0	94,0	160,0	68

