




-18°C ÷ +80°C



Working pressure:
12 Bar
10 Bar (if connected with PCP)

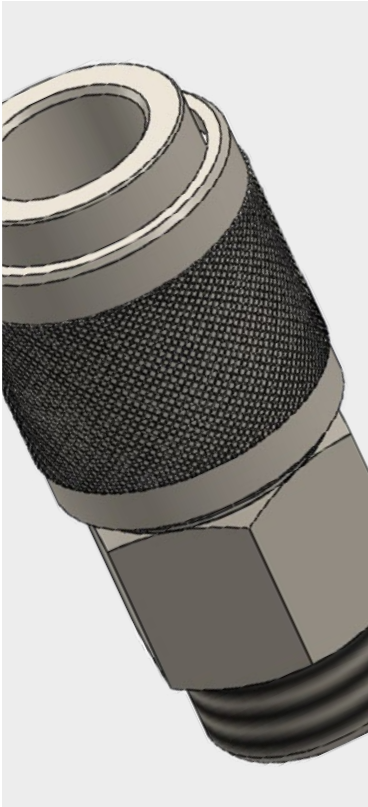

Compressed air



Parallel gas BSPP ISO 228
from G1/4" to G1/2"



Body: Nickel-plated brass
Spring: Nickel-plated steel

PROFILE - JAPAN SERIES



NOMINAL DIAMETER

7,5 mm

AIR FLOWRATE

2000 l/min




Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863

VIEW - QUICK COUPLING 8910FM

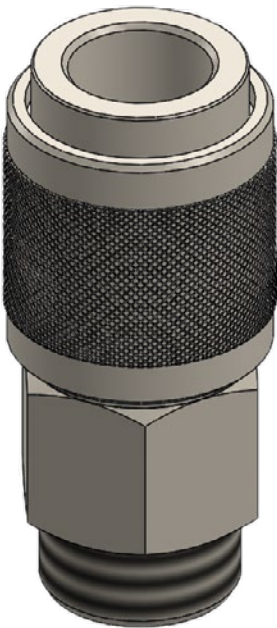

8910FM


Male quick coupling BSPP thread



CODE	T	I	D	L	H
8910FM02	G 1/4"	11,0	24,0	56,5	20
8910FM03	G 3/8"	11,5	24,0	53,0	20
8910FM04	G 1/2"	14,0	24,0	55,0	22

8920FF


Female quick coupling BSPP thread



CODE	T	I	D	L	H
8920FF02	G 1/4"	11,0	24,0	54,0	20
8920FF03	G 3/8"	12,0	24,0	54,0	20
8920FF04	G 1/2"	14,0	24,0	55,0	20

8930RE

Quick coupling with barb connector




CODE	Ø	D	L1	L	H
8930RE08	8	24,0	20,0	67,0	19
8930RE10	10	24,0	20,0	67,0	19
8930RE12	12	24,0	20,0	67,0	19



8960MM


Male connection BSPP thread

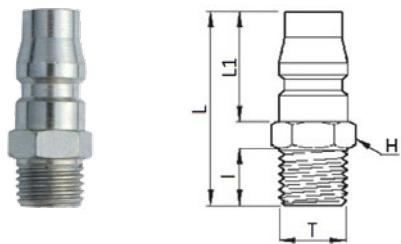

CODE	T	I	L	L1	H
8960MM02	G 1/4"	11,0	37,0	21,0	14
8960MM03	G 3/8"	11,5	37,5	21,0	17
8960MM04	G 1/2"	14,0	40,5	21,0	22

8970FM


Female connection BSPP thread

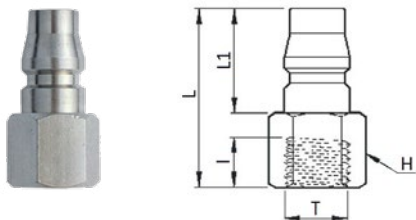

CODE	T	I	L	L1	H
8970FM02	G 1/4"	12,0	36,0	21,0	17
8970FM03	G 3/8"	13,0	37,0	21,0	19
8970FM04	G 1/2"	14,0	38,0	21,0	22

8980RE


Connection with barb connector



CODE	Ø	D	L	L1	L2
8980RE06	6	20	43,0	14,0	21,0
8980RE08	8	20	43,0	14,0	21,0
8980RE10	10	20	43,0	14,0	21,0

PCP

Push-in fitting connection for tube

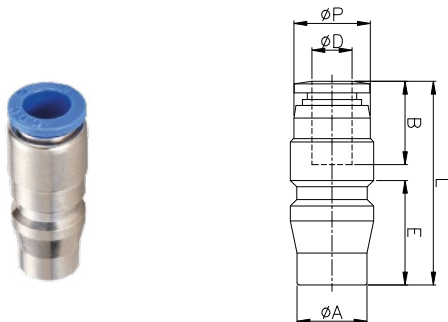

CODE	ØD	DN	ØP	ØA	L	E	B
PCP04N	4	3,0	10,0	10,9	31,0	16,3	14,8
PCP06N	6	5,0	11,9	10,9	31,7	16,3	17,4
PCP08N	8	6,0	14,0	10,9	34,9	16,3	18,4
PCP10N	10	8,0	16,0	10,9	42,4	16,3	19,7
PCP12N	12	8,0	19,0	10,9	45,4	16,3	21,9
PCP16N	16	8,0	24,0	10,9	49,3	16,3	24,5

