




-20°C ÷ 150°C



Working pressure:
10 Bar

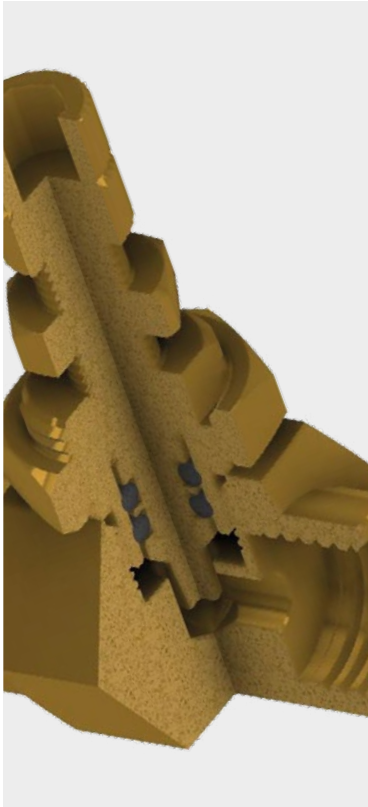

Compressed air, potable
water and fluids suitable with
construction materials



Parallel gas BSPP ISO 228
G1/4"



Manual flow regulation

Body: Yellow brass CW510L

NSF/ANSI 372 compliant



Regulation screw: Yellow brass

CW510L NSF/ANSI 372 compliant

O-ring: FKM Perox FDA compliant

Handle: Yellow brass CW510L

NSF/ANSI 372 compliant

Materials in compliance for food contact -
EC 1935/2004 and D.M.174/2004



NSF/ANSI 169

COMPONENT



SILICONE FREE



Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863

LEAD FREE


Complies with the lead content requirements for "LEAD FREE" plumbing
(U.S. Safe Drinking Water Act).

CONSTRUCTION DETAILS

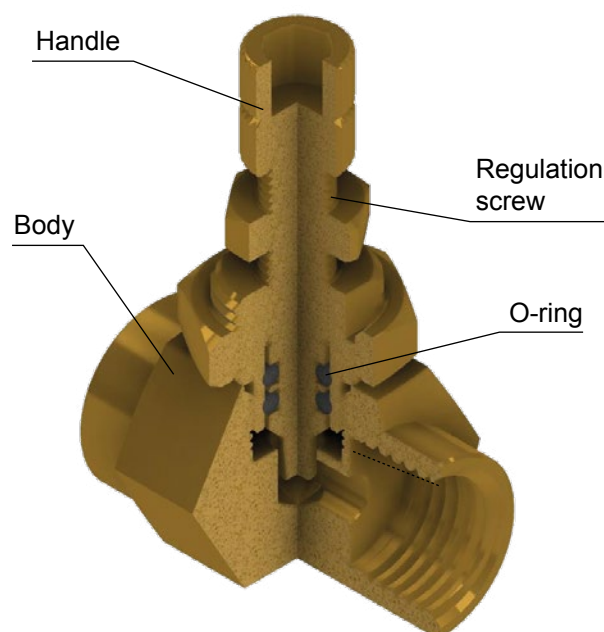

LFSF-B

Bidirectional flow regulator, bulkhead, F/F BSPP thread, with manual regulation



CODE	T	L1	L2	L3	L4	L5	A	CH1	CH2	CH3
LFSF-B02	G 1/4"	8,0	10,5	22,5	5,0	30,0	9,5	19	16	10

