




-20°C ÷ 160°C

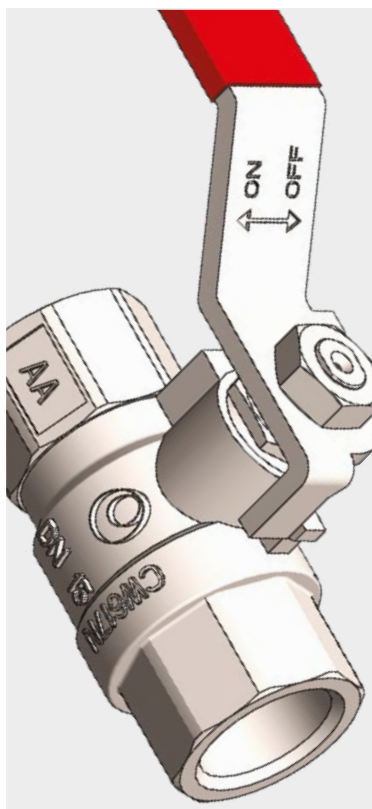

Working pressure:

50 Bar (from 1/4" to 3/4")

40 Bar (from 1" to 1-1/4")

32 Bar (from 1-1/2" to 2")

25 Bar (from 2-1/2" to 4")



Compressed air, hydrothermal systems and fluids suitable with construction materials



Parallel gas BSPP ISO 228-1 from G1/4" to G4"

AVAILABILITY

Ball available in stainless steel AISI 304 on request

Body: Nickel-plated brass

CW617N UNI EN 12165/98

Stem (anti blow-out): Brass

CW614N UNI EN 12164/98

Body end: Nickel-plated brass

CW617N UNI EN 12165/98



Ball: Chromed brass

CW617N UNI EN 12165/98

Seat: PTFE

O-ring: FKM

Handle: PVC coated steel


Nut: Zinc-plated steel

Stem seal: PTFE

Packing nut: Brass

CW614N UNI EN 12164/98

CONSTRUCTION DETAILS

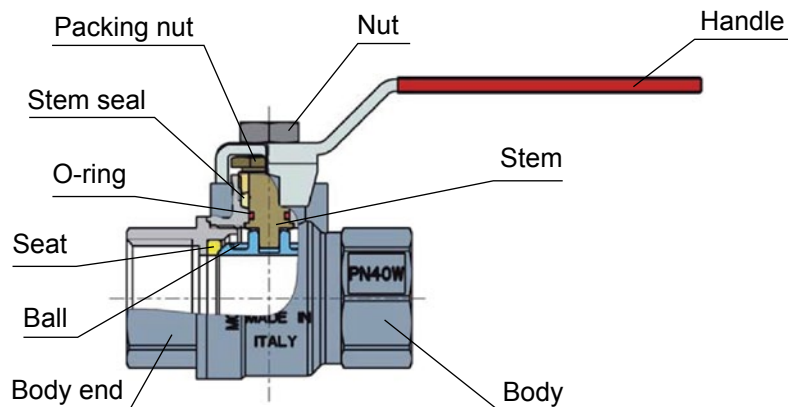

WRAS approved product



ACS approved product




Products in compliance with EC Regulation 1907/2006



Products in compliance with the directive EU 2015/863

PRESSURE-TEMPERATURE CHART

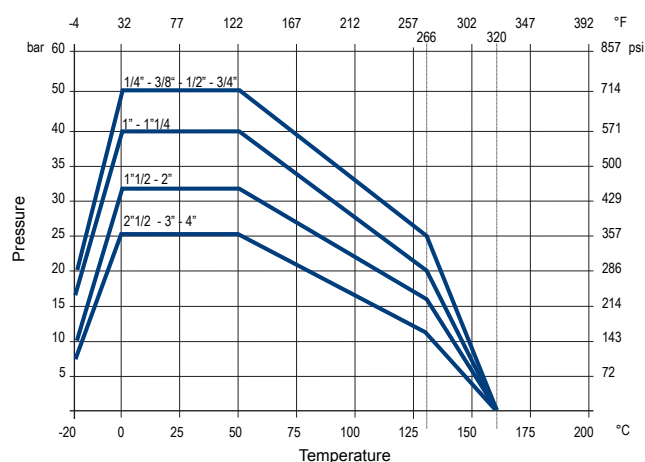


drawings and technical data are not binding & can be changed without notice



9210H

Universal full bore ball valve heavy series, female BSPP thread, red lever

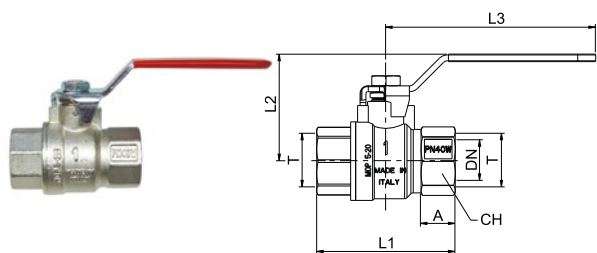

CODE	T	DN	A	L1	L2	L3	CH
9210TRH14	G 1/4"	10	12	45,0	40,0	80,0	21
9210TRH38	G 3/8"	10	12	45,0	40,0	80,0	21
9210TRH12	G 1/2"	15	17	63,0	52,0	90,0	26
9210TRH34	G 3/4"	20	19,5	71,0	55,0	90,0	31
9210TRH1	G 1"	25	21	83,0	64,0	125,0	38
9210TRH114	G 1-1/4"	32	22	92,0	69,0	125,0	48
9210TRH112	G 1-1/2"	40	23,5	104,0	78,0	140,0	55
9210TRH2	G 2"	50	28	124,0	85,0	140,0	68
9210TRH212	G 2-1/2"	60	28	140,0	131,0	250,0	85
9210TRH3	G 3"	74	30,5	159,0	140,0	250,0	99
9210TRH4	G 4"	94	38	196,0	154,0	250,0	125

