




9270 - 9280:
-20°C ÷ 150°C
9272 - 9282:
-10°C ÷ 100°C



Working pressure:
9270 - 9280
32 Bar (from 1/4" to 1")
25 Bar (from 1-1/4" to 2")
9272 - 9282
25 Bar (from 1/4" to 2")

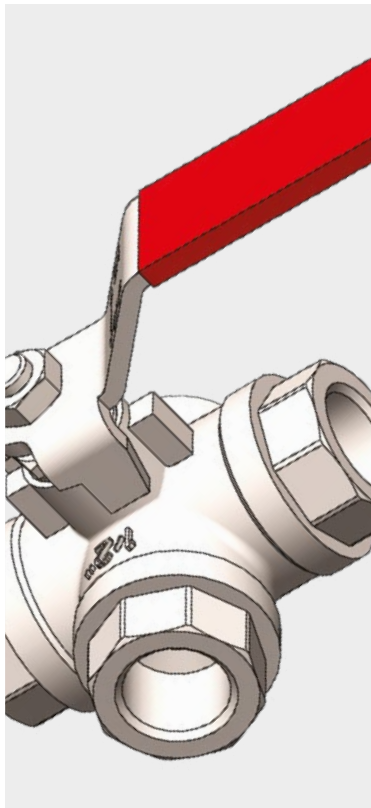

Compressed air, hydraulic,
sanitary, irrigation and fluids
suitable with construction
materials



Parallel gas BSPP ISO 228-1
from G1/4" to G2"

Body: Nickel-plated brass
CW617N UNI EN 12165/98
Stem: Brass
CW614N UNI EN 12164/98
Body end: Nickel-plated brass
CW617N UNI EN 12165/98
Ball: Chromed brass
CW617N UNI EN 12165/98
Seat: PTFE
O-ring: FKM (9272 & 9282)
Handle: PVC coated steel
Nut: Zinc-plated steel
Stem seal: PTFE
Packing nut: Brass
CW614N UNI EN 12164/98
Indicator: Aluminium (9272 & 9282)




Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863


CONSTRUCTION DETAILS

9270 & 9280

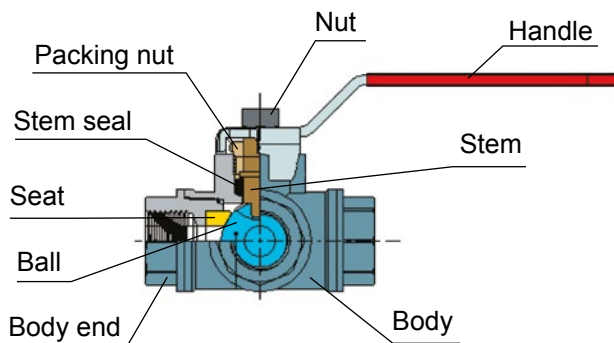


PRESSURE-TEMPERATURE CHART

9270 & 9280

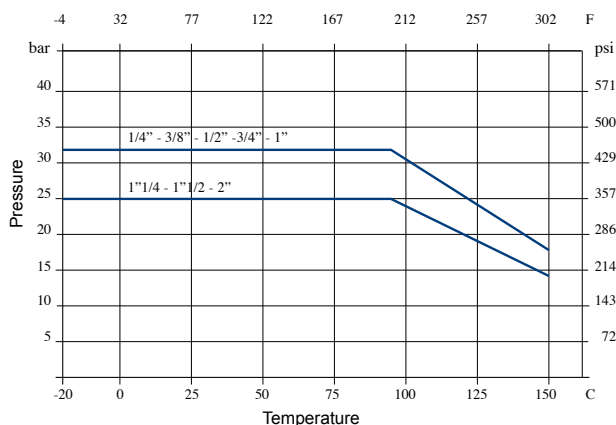


CONSTRUCTION DETAILS

9272 & 9282

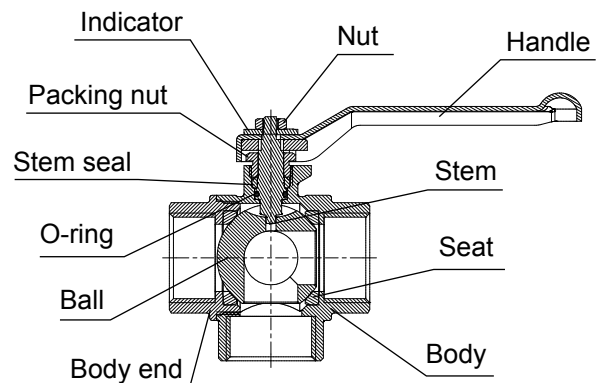


PRESSURE-TEMPERATURE CHART

9272 & 9282

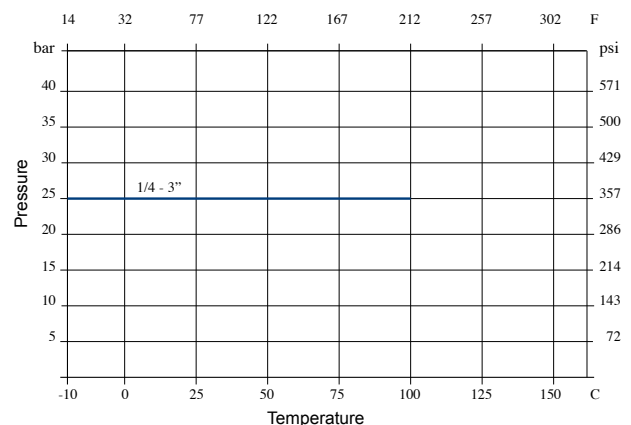


9270

Three-ways T port ball valve, reduced bore, female BSPP thread, red lever

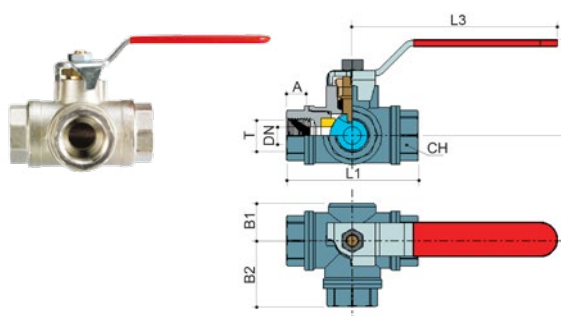


CODE	T	DN	A	B1	B2	L1	L2	L3	CH
9270TR14	G 1/4"	10	12	22	37	74,0	58,0	90,0	22
9270TR38	G 3/8"	10	12	22	37	74,0	58,0	90,0	22
9270TR12	G 1/2"	12	14	24	39	80,0	60,0	125,0	29
9270TR34	G 3/4"	15	16	28	46	90,0	64,0	125,0	34
9270TR1	G 1"	20	19	31	52	105,0	73,0	140,0	42
9270TR114	G 1-1/4"	25	21	35	58	115,0	79,0	140,0	50
9270TR112	G 1-1/2"	32	23	42	69	138,0	100,0	220,0	57
9270TR2	G 2"	40	26	48	80	161,0	105,0	220,0	68




To obtain the "T2" configuration, unscrew the nut, remove the lever and rotate the ball 180°. Then replace the lever in the standard position.

9280

Three-ways L port ball valve, reduced bore, female BSPP thread, red lever

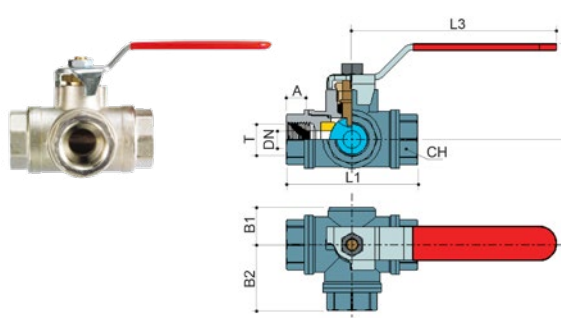


CODE	T	DN	A	B1	B2	L1	L2	L3	CH
9280TR14	G 1/4"	10	12	22	37	74,0	58,0	90,0	22
9280TR38	G 3/8"	10	12	22	37	74,0	58,0	90,0	22
9280TR12	G 1/2"	12	14	24	39	80,0	60,0	125,0	29
9280TR34	G 3/4"	15	16	28	46	90,0	64,0	125,0	34
9280TR1	G 1"	20	19	31	52	105,0	73,0	140,0	42
9280TR114	G 1-1/4"	25	21	35	58	115,0	79,0	140,0	50
9280TR112	G 1-1/2"	32	23	42	69	138,0	100,0	220,0	57
9280TR2	G 2"	40	26	48	80	161,0	105,0	220,0	68



9272


Three-ways reduced bore T ball valve, female BSPP thread, red lever

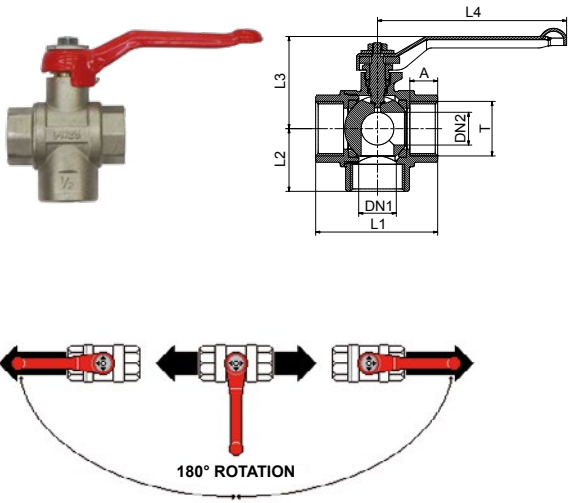

CODE	T	DN1	DN2	A	L1	L2	L3	L4
9272TR14	G 1/4"	10	10	14	53,0	31,0	48,0	92,0
9272TR38	G 3/8"	10	10	14	53,0	31,0	48,0	92,0
9272TR12	G 1/2"	10	10	14	55,0	31,0	48,0	92,0
9272TR34	G 3/4"	15	15	16	66,0	34,0	50,0	92,0
9272TR1	G 1"	20	20	17	74,0	38,0	55,0	115,0
9272TR114	G 1-1/4"	25	25	18	85,0	46,0	68,0	150,0
9272TR112	G 1-1/2"	32	32	19	97,0	53,0	73,0	150,0
9272TR2	G 2"	40	40	21	109,0	62,0	79,0	150,0

9282

Three-ways reduced bore L ball valve, female BSPP thread, red lever

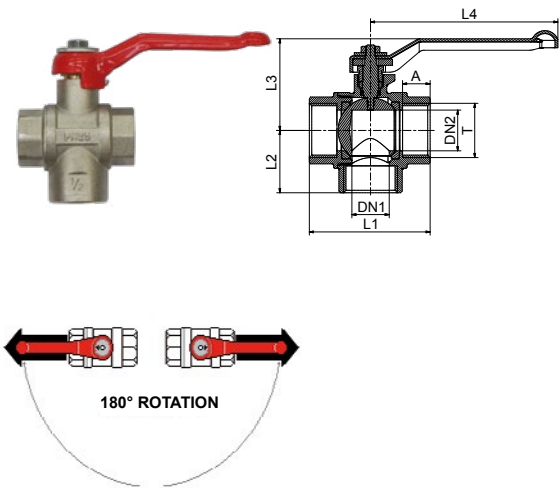

CODE	T	DN1	DN2	A	L1	L2	L3	L4
9282TR14	G 1/4"	10	10	14	53,0	31,0	48,0	92,0
9282TR38	G 3/8"	10	10	14	53,0	31,0	48,0	92,0
9282TR12	G 1/2"	12	12	14	55,0	31,0	48,0	92,0
9282TR34	G 3/4"	18	20	16	66,0	34,0	50,0	92,0
9282TR1	G 1"	23	25	17	74,0	38,0	55,0	115,0
9282TR114	G 1-1/4"	30	32	18	85,0	46,0	68,0	150,0
9282TR112	G 1-1/2"	37	39	19	97,0	53,0	73,0	150,0
9282TR2	G 2"	46	48	21	109,0	62,0	79,0	150,0