




-40°C ÷ 220°C



Working pressure:
85 Bar (from 1/4" to 1")
70 Bar (from 1-1/4" to 1-1/2")
65 Bar (from 2" to 4")

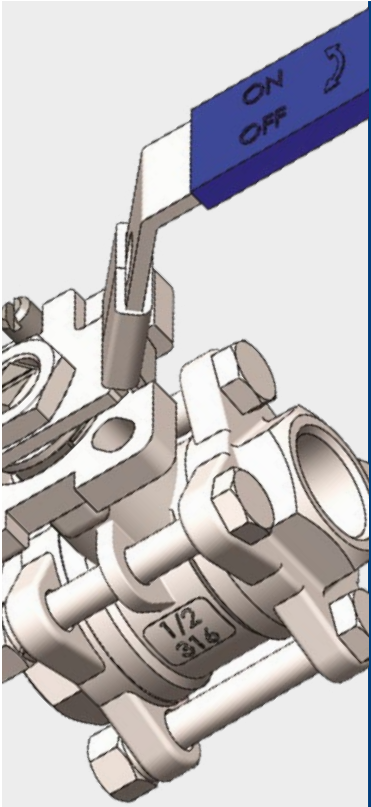

Industrial, chemical and food installations



Taper gas BSPT ISO 7/1
from R1/4" to R4"

FLANGE

ISO 5211 flange

AVAILABILITY

Available with NPT thread on request

- Body: Stainless steel AISI 316
- Stem: Stainless steel AISI 316
- Body end: Stainless steel AISI 316
- Ball: Stainless steel AISI 316
- Seat: PTFE 15% glassfiber
- Handle: Stainless steel AISI 304
PVC coated
- Nut: Stainless steel AISI 304
- Stem seal: PTFE
- Body seal: PTFE
- Washer: PTFE
- Packing nut: Stainless steel
AISI 304
- Locking: Stainless steel AISI 304
- Stop pin: Stainless steel AISI 304
- Bolt: Stainless steel AISI 304




Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

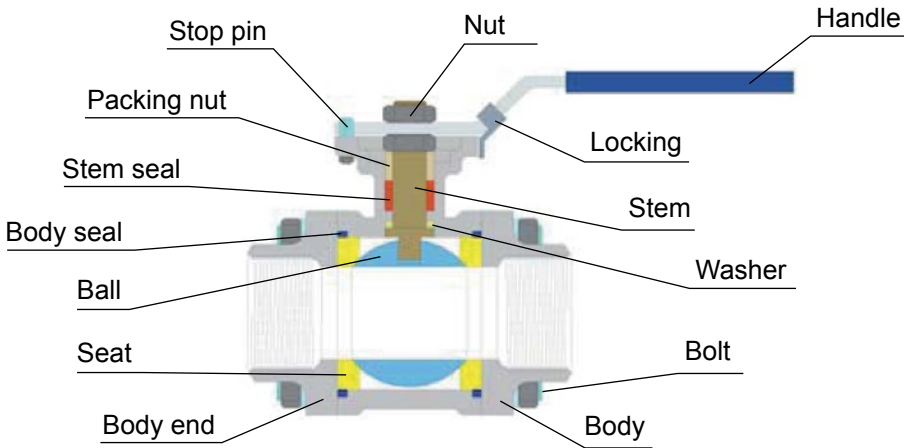


PRESSURE-TEMPERATURE CHART

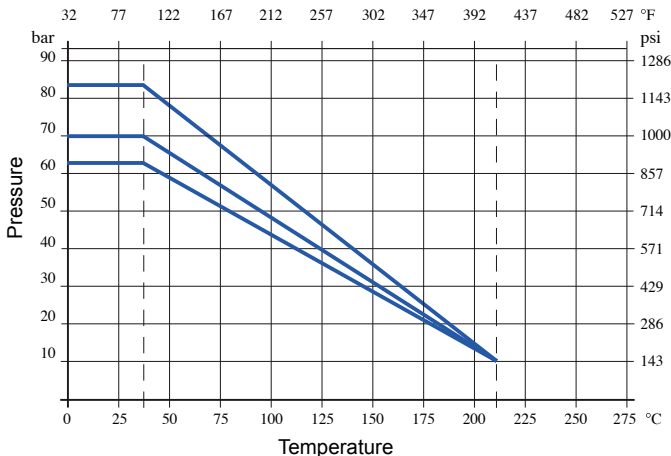

drawings and technical data are not binding & can be changed without notice

9325

Three pieces full bore universal ball valve, female BSPT thread, blue lever

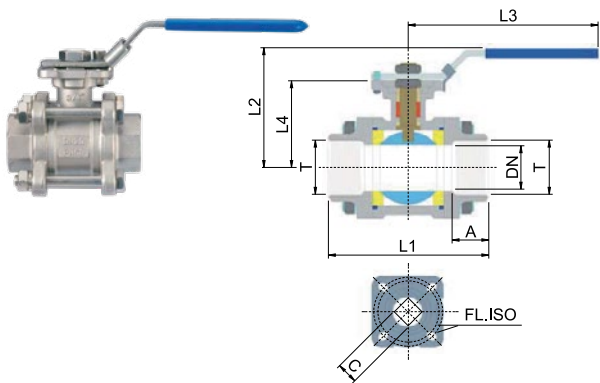

CODE	T	DN	A	L1	L2	L3	L4	C	FL.ISO	N/m
9325TR14	R 1/4"	11	10	48,0	60,0	117,0	32,5	9	F03	4
9325TR38	R 3/8"	12,7	11	48,0	60,0	117,0	32,5	9	F03	4
9325TR12	R 1/2"	15	15	55,0	65,0	117,0	37,1	9	F03/04	5
9325TR34	R 3/4"	20	16	74,0	72,0	135,0	42,2	11	F04/05	8
9325TR1	R 1"	25	19	81,0	75,0	140,0	45,0	11	F04/05	10
9325TR114	R 1-1/4"	32	21	91,0	90,0	203,0	54,0	14	F05/07	14
9325TR112	R 1-1/2"	40	21	103,0	95,0	203,0	59,5	14	F05/07	18
9325TR2	R 2"	50	25	120,0	105,0	203,0	68,0	14	F05/07	25
9325TR212	R 2-1/2"	65	30	151,0	140,0	260,0	100,0	17	F07/10	48
9325TR3	R 3"	80	33	182,0	165,0	260,0	112,5	17	F07/10	75
9325TR4	R 4"	100	39	220,0	170,0	280,0	125,5	17	F07/10	110

