




-50°C ÷ 250°C



Working pressure:
83 Bar (from 1/4" to 1")
69 Bar (from 1-1/4" to 1-1/2")
63 Bar (2")

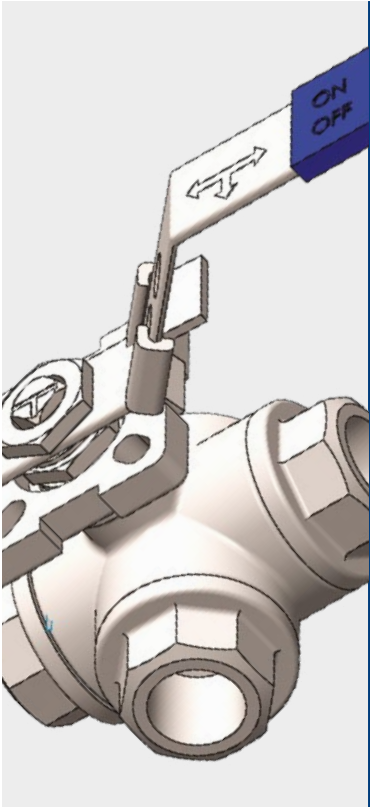

Industrial, chemical and food installations



Parallel gas BSPP
UNI EN 10226-1
from G1/4" to G2"

FLANGE

ISO 5211 flange

- Body: Stainless steel AISI 316
- Stem: Stainless steel AISI 316
- Body end: Stainless steel AISI 316
- Ball: Stainless steel AISI 316
- Seat: PTFE
- Handle: Stainless steel AISI 304
PVC coated
- Nut: Stainless steel AISI 304
- Stem seal: PTFE
- Seal: PTFE
- O-ring: Viton
- Packing nut: Stainless steel
AISI 316
- Locking: Stainless steel AISI 304
- Stop pin: Stainless steel AISI 304




Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

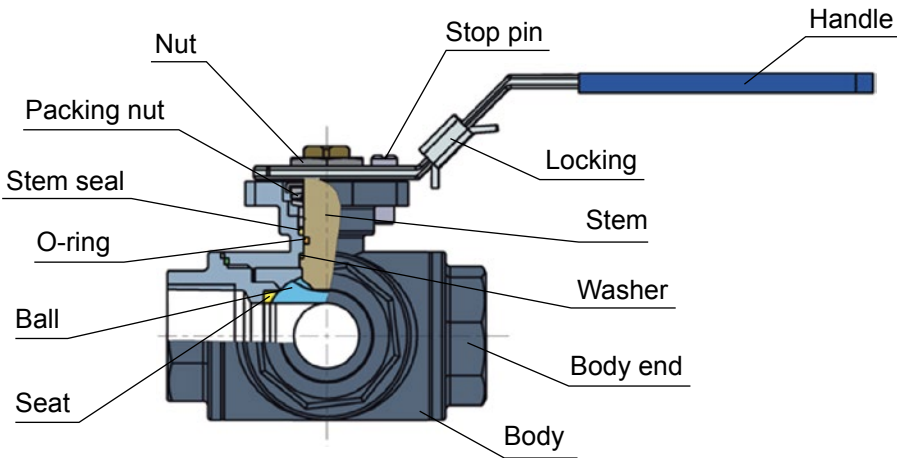



PRESSURE-TEMPERATURE CHART

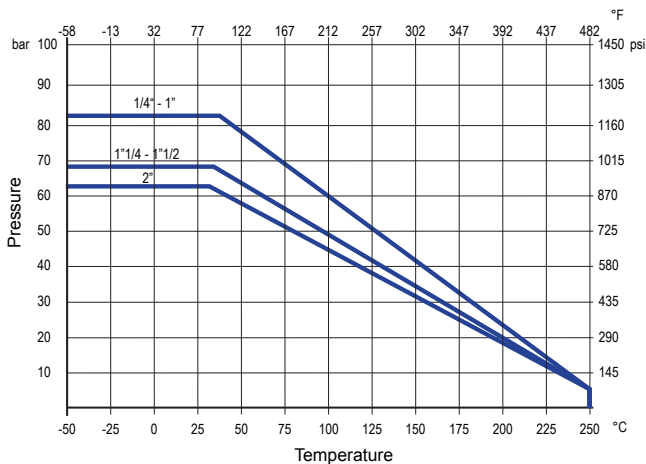

drawings and technical data are not binding & can be changed without notice

9340



Three-ways T port ball valve, reduced bore, female BSPP thread, blue lever

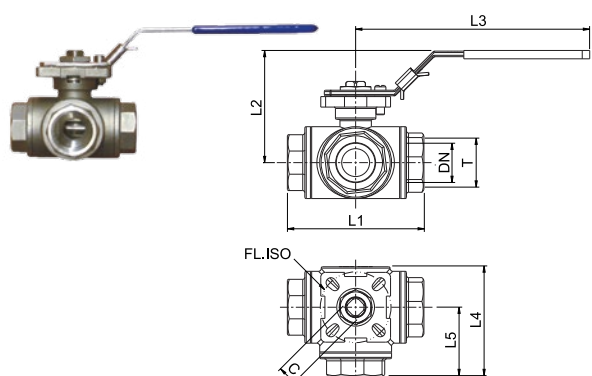

CODE	T	DN	L1	L2	L3	L4	L5	C	FL.ISO
9340TR14	G 1/4"	9,5	75,0	66,0	130,0	57,5	37,5	9	F03/04
9340TR38	G 3/8"	11	75,0	66,0	130,0	57,5	37,5	9	F03/04
9340TR12	G 1/2"	12	75,0	66,0	130,0	57,5	37,5	9	F03/04
9340TR34	G 3/4"	15	85,0	72,0	161,0	65,5	42,5	11	F04/05
9340TR1	G 1"	20	100,0	77,0	161,0	79,0	50,0	11	F04/05
9340TR114	G 1-1/4"	25	122,0	92,0	203,0	97,0	61,0	14	F05/07
9340TR112	G 1-1/2"	32	131,0	96,0	203,0	106,5	65,5	14	F05/07
9340TR2	G 2"	40	158,0	107,0	203,0	129,0	79,0	14	F05/07

9342

Three-ways L port ball valve, reduced bore, female BSPP thread, blue lever

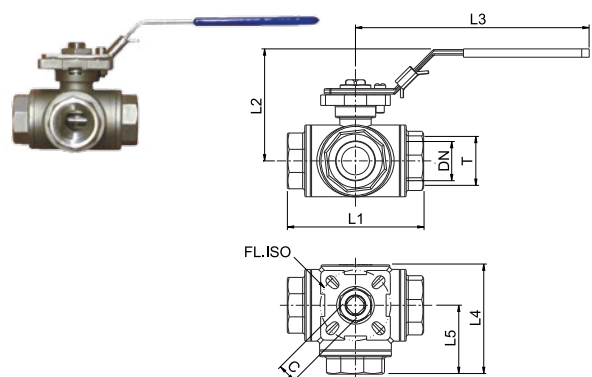

CODE	T	DN	L1	L2	L3	L4	L5	C	FL.ISO
9342TR14	G 1/4"	9,5	75,0	66,0	130,0	57,5	37,5	9	F03/04
9342TR38	G 3/8"	11	75,0	66,0	130,0	57,5	37,5	9	F03/04
9342TR12	G 1/2"	12	75,0	66,0	130,0	57,5	37,5	9	F03/04
9342TR34	G 3/4"	15	85,0	72,0	161,0	65,5	42,5	11	F04/05
9342TR1	G 1"	20	100,0	77,0	161,0	79,0	50,0	11	F04/05
9342TR114	G 1-1/4"	25	122,0	92,0	203,0	97,0	61,0	14	F05/07
9342TR112	G 1-1/2"	32	131,0	96,0	203,0	106,5	65,5	14	F05/07
9342TR2	G 2"	40	158,0	107,0	203,0	129,0	79,0	14	F05/07

