




-18°C ÷ 80°C



Max working pressure:  
12 Bar

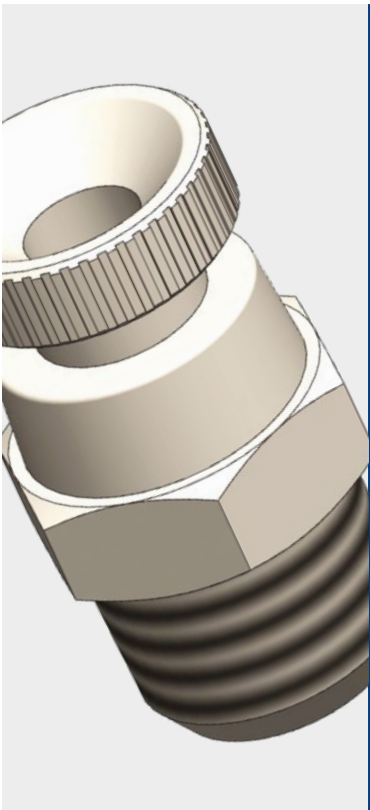

Compressed air and fluids  
suitable with construction  
materials



Taper gas BSPT ISO 7  
from R 1/8" to R 1/2"



Body: Nickel-plated brass  
(9611TR18, 9611TR14, 9611TR38)  
Steel (9611TR12)  
Handle: Nickel-plated brass  
(9611TR18, 9611TR14, 9611TR38)  
Steel (9611TR12)




Products in compliance with  
EC Regulation 1907/2006




Products in compliance with  
the directive EU 2015/863

CONSTRUCTION DETAILS

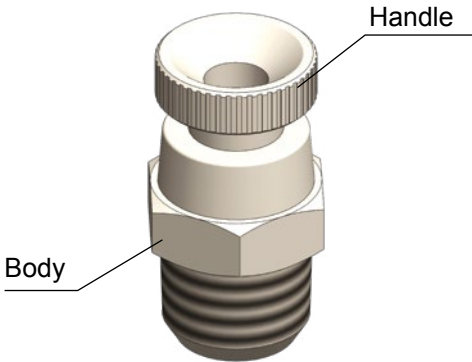

9611

Condensate drain valve BSPT thread



| CODE     | T      | L1   | L2   | L3  | CH |
|----------|--------|------|------|-----|----|
| 9611TR18 | R 1/8" | 29   | 20,5 | 6,5 | 12 |
| 9611TR14 | R 1/4" | 24   | 16   | 5   | 14 |
| 9611TR38 | R 3/8" | 22,5 | 15   | 5   | 17 |
| 9611TR12 | R 1/2" | 27   | 19   | 6   | 22 |

